



HOSHIZAKI

PRODUCT / SALES CATALOG

ICE MACHINES

DISPENSERS

STORAGE BINS

DISPLAY CASES

REACH-INS

“A Superior Degree of Reliability”

www.hoshizakiamerica.com

Item #40067 | 2/24/2015





CORPORATE MISSION

Hoshizaki America's corporate mission is to achieve and maintain optimum customer satisfaction, by consistently providing the highest level of quality in the products and services delivered to all customers throughout the western hemisphere; to perpetuate a healthy, viable organization; and to deserve the reputation as an innovative leader from a technological and people standpoint in the commercial kitchen equipment industry.

In order to create a more environmentally friendly society, both Corporations and individuals must work together for an Eco-Friendly world. Our Ecology plan is based on ISO-14001 which stipulates development of Energy Saving products, as well as, Conservation and Preservation practices. Hoshizaki Japan is ISO-14001 certified.



CORPORATE LOCATIONS

Hoshizaki America, Inc. with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Using state-of-the-art technology, every Hoshizaki ice machine is run-tested at the factory, and undergoes rigorous quality performance tests including ice production capacity and energy efficiency. Hoshizaki America offers advanced seminars at our headquarters and basic training programs which are scheduled across the country for both service representatives and customers.



Peachtree City Facility



Griffin Facility


DID YOU KNOW?

- **Hoshizaki** is the world's largest manufacturer of commercial ice equipment, employing over 10,000 people.
- **Hoshizaki** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2 billion serving customers in 75 nations.
- **Hoshizaki** operates plants worldwide including two in the USA, three in Japan, one in England, China, Australia and Mexico.
- **Hoshizaki** operates sales offices worldwide with distribution throughout 75 nations.
- 47 of the top 50 U.S. foodservice chains specify and use **Hoshizaki** products.
- In expansion to a fullservice kitchen equipment company, **Hoshizaki** acquired Lancer Corporation in 2006 and GRAM Commercial A/S in 2008.
- In 2012, **Hoshizaki** was voted the "Best In Class" by Operators
- **Hoshizaki** is certified in both ISO-9001 and ISO-14001 - being the first and only foodservice equipment manufacturer to achieve ISO-14001.




TYPES OF ICE


Crescent Cube - Individual, hard, clear, crescent shape
Models - KM, KMD, KML, KMS, KMH, DKM models

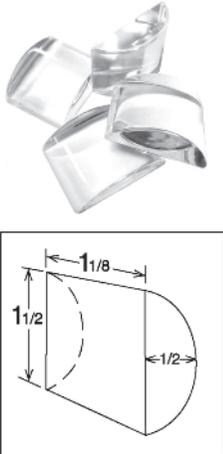



“Top Hat” Cube - Individual, hard, clear, round shape
Models - AM models

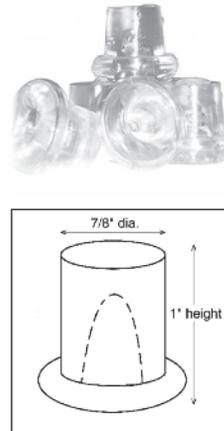


Square Cube - Individual, hard, clear, square shape
Models - IM models

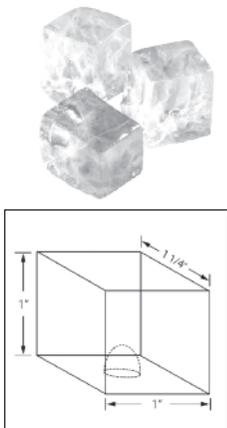


Flaked - Soft, light, chewable, various shapes
Models - F models

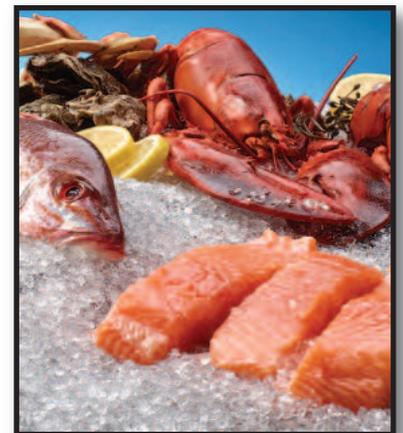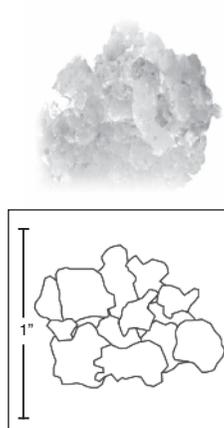

Cubelet - Chewable, soft, light, small pellet shape
Models - C, F-C, FD-C, FS-C, DCM models

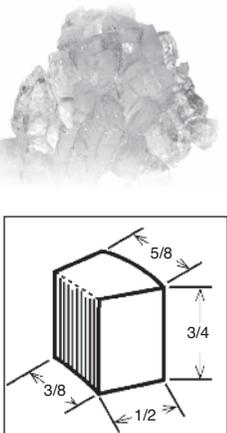

CUBELET SIZES

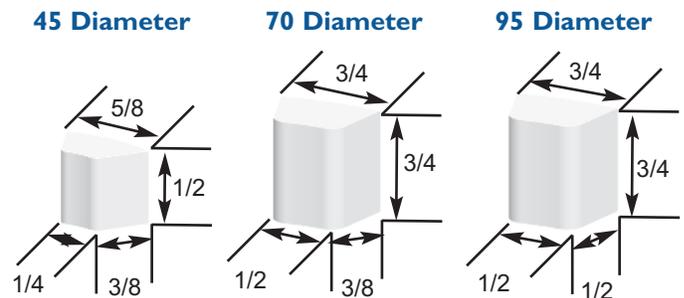




Features & Benefits of the AM Cuber



AM Evaporator




AM Cube Dimensions

- Attractive stainless steel finish
- Individual top-hat style cubers eliminates clumping and allow for easy filling of glass
- The **AM Series Cubers** were designed with fewer moving parts, which contribute to its longer life and dependability
- The compact size (less than 34 inches!), undercounter design, swing style reversible door, and UL approval for outdoor use of the AM-50BAE expand the possibilities where this machine can be installed
- Front in and front out airflow allows unit to be built into cabinetry without additional ventilation
- The ice making compartment can be easily disassembled for cleaning
- -DS - door system is designed to accommodate custom cabinetry
- ADA Compliant




Features & Benefits of the KM Cuber



KM Cube Dimensions



- The **KM Cuber Series** features an attractive stainless steel finish with the simplest icemaking system in the industry
- The exclusive dual-sided stainless steel evaporator has oval-shaped copper refrigerant tubing for the most efficient heat exchange
- Hoshizaki's evaporator design freezes the purest water, washing most of the minerals and impurities down the drain; resulting in individual crystal clear crescent cubers
- Not affected by caustic water, therefore no plating to peel or flake and no plastic to crack
- Fewer moving parts and cycles means dependability, longer machine life and energy savings
- Features the CycleSaver™ design - allows production of the same amount of ice in half the cycles of other ice machines
- Houses the EverCheck™ control board - sounds an audible warning when service is needed
- Contains *H-GUARD Plus* Antimicrobial Agent

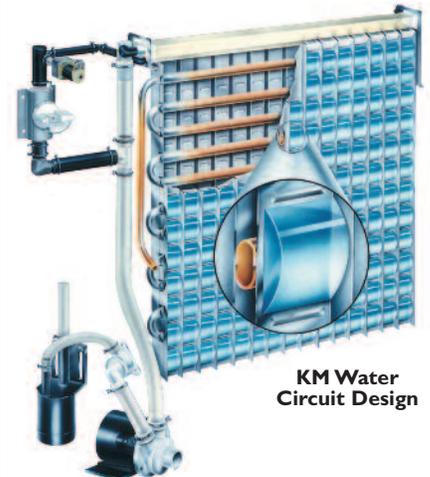

KM Water Circuit Design

Compartmentalized Design



Sealed, Insulated Evaporator Compartment

Dry Electrical and Compressor Compartment

Insulated Ice Drop Compartment

Dry Pump Compartment

CUBER ICE USAGE GUIDE

Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Cocktail Lounge	3.0 lbs. ice per seat
Lodging	
Food Service	1.5 lbs. ice per seat
Banquet Service	1.0 lbs. ice per seat
Guest Ice	5.0 lbs. ice per room
Beverage Service	5.0 oz. ice per 7 - 10 oz. cup
Convenience Store	8.0 oz. ice per 12 - 16 oz. cup
Fast Food	10.0 oz. ice per 20 - 32 oz. cup
Salad Bar/Seafood Display	30 lbs. ice per cubic feet



CUBER SERIES


SELF-CONTAINED CUBERS with Built-In Bins

AM-50BAE SERIES | 14 7/8" W X 22 5/8" D X 33 1/2" H

Under Counter Unit



Self-Contained Bin Storage Capacity
Up to 27 Lbs.



UL approved for outdoor use



-DS shown with Custom Cabinetry



14 7/8 x 22 5/8 x 33 1/2
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
AM-50BAE	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.
AM-50BAE-DS†	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.
AM-50BAE-AD*	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.
AM-50BAE-ADDS*†	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.

*The ADA compliant machine dimensions are 14 7/8" width x 22 5/8" depth x 31 1/2" height

†Designed to accommodate custom cabinetry


Rated @ 70° Air / 50° Water

KM-61BAH | 17 3/4" W X 24" D X 39" H (*6" Legs Included)

Under Counter Unit



Self-Contained Bin Storage Capacity
Up to 38 Lbs.



ETL **NSE**



17 3/4 x 24 x 39*
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-61BAH *	Air-Cooled	50	115V/60/1	10.6	20.6	N/A	117 Lbs.

*The KM-61BAH is ENERGY STAR qualified.


Rated @ 90° Air / 70° Water

KM-101BAH | 23 3/4" W X 24" D X 39" H (*6" Legs Included)

Under Counter Unit



Self-Contained Bin Storage Capacity
Up to 53 Lbs.



ALDI CERTIFIED **ETL** **NSE**
Rated in accordance with ARI Standard 810-95



23 3/4 x 24 x 39*
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-101BAH *	Air-Cooled	88	115V/60/1	9.4	23.0	N/A	136 Lbs.

*The KM-101BAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water

CUBER SERIES




SELF-CONTAINED CUBER with Built-In Bins

KM-151BAH | 23 3/4" W X 28" D X 39" H (*6" Legs Included) Under Counter Unit



Self-Contained Bin Storage Capacity
Up to 78 Lbs.



23 3/4 x 28 x 39*
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-151BAH*	Air-Cooled	121	115V/60/1	8.4	17.8	N/A	150 Lbs.
KM-151BWH	Water-Cooled	130	115V/60/1	7.3	25.0	140	154 Lbs.


*The KM-151BAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water

KM-201B_H | 24" W X 28" D X 39" H (*6" Legs Included) Under Counter Unit



Self-Contained Bin Storage Capacity
Up to 80 Lbs.



24 x 28 x 39*
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-201BAH*	Air-Cooled	165	115V/60/1	7.5	22.0	N/A	165 Lbs.
KM-201BWH*	Water-Cooled	181	115V/60/1	6.2	24.0	141.3	165 Lbs.

*The KM-201BAH is ENERGY STAR qualified.


Rated @ 90° Air / 70° Water

*KM-201B - Ice bin opening is ADA compliant

KM-260B_H | 30" W X 28" D X 39" H (*6" Legs Included) Under Counter Unit



Self-Contained Bin Storage Capacity
Up to 100 Lbs.



30 x 28 x 39*
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-260BAH*	Air-Cooled	200	115V/60/1	7.6	20.3	N/A	187 Lbs.
KM-260BWH*	Water-Cooled	237	115V/60/1	6.4	26.3	121	187 Lbs.

*The KM-260BAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


*KM-260B - Ice bin opening is ADA compliant



CUBER SERIES

KM CRESCENT CUBERS

KML-250M SERIES | 30"W X 27 3/8"D X 22"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



30	32 1/2	55 3/8
Wide	Deep	High



30	32 1/2	68
Wide	Deep	High




30	30	75
Wide	Deep	High

Dimensions shown include Hoshizaki Bins


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KML-250MAH	Air-Cooled	238	115V/60/1	8.2	35.2	N/A	185 Lbs.
KML-250MWH	Water-Cooled	284	115V/60/1	6.23	43.7	123	185 Lbs.

Rated @ 90° Air / 70° Water


KM-320M SERIES | 22"W X 27 3/8"D X 30 5/16"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




22	32 1/2	76 5/16
Wide	Deep	High




30	32 1/2	76 5/16
Wide	Deep	High



44	32 1/2	76 5/16
Wide	Deep	High



48	32 1/2	76 5/16
Wide	Deep	High




52	32 1/2	76 5/16
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-320MAH	Air-Cooled	246	115V/60/1	7.5	31.2	N/A	153 Lbs.
KM-320MWH	Water-Cooled	318	115V/60/1	5.2	21.9	121	153 Lbs.

Rated @ 90° Air / 70° Water

KML-351M SERIES | 30"W X 27 3/8"D X 22"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



30	32 1/2	55 3/8
Wide	Deep	High



30	32 1/2	68
Wide	Deep	High



30	30	75
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KML-351MAH	Air-Cooled	282	115V/60/1	6.4	20.3	N/A	185 Lbs.
KML-351MWH	Water-Cooled	307	115V/60/1	5.41	20.5	143	185 Lbs.


Rated @ 90° Air / 70° Water

CUBER SERIES



KM CRESCENT CUBERS


KMD-410M SERIES | 22"W X 24"D X 24"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



22	30 1/2	35 3/8
Wide	Deep	High



30	32 1/2	68 1/8
Wide	Deep	High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMD-410MAH	Air-Cooled	324	115-120V/60/1*	5.8	22.6	N/A	161 Lbs.
KMD-410MWH	Water-Cooled	382	115-120V/60/1*	4.3	23.2	145	163 Lbs.

*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water


KMD-450M and KMD-460 SERIES | 30"W X 24 1/4"D X 22 1/8"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



22	30 1/2	34
Wide	Deep	High



30	32 1/2	68 1/8
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMD-450MWH	Water-Cooled	415	115-120V/60/1*	4.6	17.8	126	170 Lbs.

*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMD-460MAH *	Air-Cooled	387	115-120V/60/1*	5.5	18.9	N/A	170 Lbs.

*The KMD-460MAH is ENERGY STAR qualified.

*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water


KML-451M SERIES | 30"W X 27 3/8"D X 22"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



30	32 1/2	55 3/8
Wide	Deep	High



30	32 1/2	68
Wide	Deep	High



30	30	75
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KML-451MAH *	Air-Cooled	349	115V/60/1	6.7	18.3	N/A	185 Lbs.
KML-451MWH	Water-Cooled	415	115V/60/1	5.3	19.7	138	185 Lbs.

*The KML-451MAH is ENERGY STAR qualified.


Rated @ 90° Air / 70° Water




CUBER SERIES

KM CRESCENT CUBERS


KM-515M SERIES | 22"W X 27 3/8"D X 30 5/16"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




22	x	32 1/2	x	76 5/16
Wide	Deep	High		




30	x	32 1/2	x	76 5/16
Wide	Deep	High		



44	x	32 1/2	x	76 5/16
Wide	Deep	High		



48	x	32 1/2	x	76 5/16
Wide	Deep	High		



52	x	32 1/2	x	76 5/16
Wide	Deep	High		


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-515MAH(-P) *	Air-Cooled	450	115V/60/1	5.91	18.5	N/A	175 Lbs.
KM-515MWH(-P)	Water-Cooled	446	115V/60/1	5.14	23.0	106	175 Lbs.
KM-515MRH	Remote A-C	452	115V/60/1	5.8	20.8	N/A	175 Lbs.


*The KM-515MAH and KM-515MAH-P are ENERGY STAR qualified.
(-P) Exterior fasteners are tamper proof torx pin screws

Rated @ 90° Air / 70° Water


KM-600MAH (115V) | 22"W X 27 3/8"D X 37 5/16"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




22	x	32 1/2	x	83 5/16
Wide	Deep	High		




30	x	32 1/2	x	83 5/16
Wide	Deep	High		



44	x	32 1/2	x	83 5/16
Wide	Deep	High		



48	x	32 1/2	x	83 5/16
Wide	Deep	High		



52	x	32 1/2	x	83 5/16
Wide	Deep	High		


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-600MAH *	Air-Cooled	503	115-120V/60/1	5.7	19.7	N/A	200 Lbs.


*The KM-600MAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


KML-631M SERIES | 30"W X 27 3/8"D X 26"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



30	x	32 1/2	x	59 3/8
Wide	Deep	High		



30	x	32 1/2	x	72
Wide	Deep	High		



30	x	30	x	79
Wide	Deep	High		

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KML-631MAH *	Air-Cooled	510	208-230V/60/1*	5.7	16.0	N/A	220 Lbs.
KML-631MWH	Water-Cooled	620	208-230V/60/1*	4.2	16.0	120	217 Lbs.
KML-631MRH *	Remote A-C	600	208-230V/60/1*	5.3	16.0	N/A	220 Lbs.

*The KML-631MAH and KML-631MRH are ENERGY STAR qualified. *3 wire with neutral for 115V


Rated @ 90° Air / 70° Water

CUBER SERIES




KM CRESCENT CUBERS


KM-650M SERIES | 22"W X 27 3/8"D X 37 5/16"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




22	x	32 1/2	x	83 5/16
Wide		Deep		High




30	x	32 1/2	x	83 5/16
Wide		Deep		High



44	x	32 1/2	x	83 5/16
Wide		Deep		High



48	x	32 1/2	x	83 5/16
Wide		Deep		High



52	x	32 1/2	x	83 5/16
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-650MAH *	Air-Cooled	562	208-230V/60/1	5.51	18.0	N/A	200 Lbs.
KM-650MWH	Water-Cooled	654	208-230V/60/1	4.16	22.4	153	200 Lbs.
KM-650MRH	Remote A-C	564	208-230V/60/1	5.6	16.5	N/A	200 Lbs.

*The KM-650MAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


KMD-850M SERIES | 30"W X 24 5/8"D X 28"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



30	x	30 1/2	x	39 5/8
Wide		Deep		High




48	x	32 1/2	x	74
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMD-850MAH	Air-Cooled	625	208-230V/60/1	6.2	34.0	N/A	249 Lbs.
KMD-850MWH	Water-Cooled	732	208-230V/60/1	4.7	31.0	182	249 Lbs.
KMD-850MRH	Remote A-C	680	208-230V/60/1	5.8	28.0	N/A	235 Lbs.

Rated @ 90° Air / 70° Water


KM-901M SERIES | 30"W X 27 3/8"D X 37 7/16"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




30	x	32 1/2	x	83 7/16
Wide		Deep		High



44	x	32 1/2	x	83 7/16
Wide		Deep		High



48	x	32 1/2	x	83 7/16
Wide		Deep		High



52	x	32 1/2	x	83 7/16
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-901MAH(-P)	Air-Cooled	813	208-230V/60/1	5.1	16.0	N/A	256 Lbs.
KM-901MWH(-P)	Water-Cooled	864	208-230V/60/1	4.5	20.8	128	249 Lbs.
KM-901MRH	Remote A-C	785	208-230V/60/1	5.4	19.3	N/A	249 Lbs.
KM-901MRH3	Remote A-C	815	208-230V/60/1	5.4	18.0	N/A	258 Lbs.

(-P) Exterior fasteners are tamper proof torx pin screws


Rated @ 90° Air / 70° Water



CUBER SERIES

KM CRESCENT CUBERS

KMD-901M SERIES | 30"W X 24 5/8"D X 28"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



Lancer FS30

30	x	30 1/2	x	39 5/8
Wide		Deep		High



48	x	32 1/2	x	74
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMD-901MWH	Water-Cooled	870	208-230V/60/1*	4.2	24.5	125	251 Lbs.
KMD-901MRH	Remote A-C	775	208-230V/60/1*	5.3	20.0	N/A	258 Lbs.


*3 wire with neutral for 115V

Rated @ 90" Air / 70" Water

KM-1301S SERIES | 48"W X 27 3/8"D X 27 3/8"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




B-800

48	x	32 1/2	x	73 3/8
Wide		Deep		High




B-800

48	x	32 1/2	x	101 3/4
Wide		Deep		High



B-900

52	x	32 1/2	x	73 3/8
Wide		Deep		High



B-900

52	x	32 1/2	x	101 3/4
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1301SAH(-P)	Air-Cooled	1164	208-230V/60/1	4.63	15.7	N/A	315 Lbs.
KM-1301SAH3 *	Air-Cooled	1159	208-230V/60/3	4.6	15.6	N/A	315 Lbs.
KM-1301SWH(-P)	Water-Cooled	1276	208-230V/60/1	3.44	19.6	124	315 Lbs.
KM-1301SWH3	Water-Cooled	1251	208-230V/60/3	3.31	20.5	130	315 Lbs.
KM-1301SRH *	Remote A-C	1222	208-230V/60/1	4.1	16.6	N/A	315 Lbs.
KM-1301SRH3 *	Remote A-C	1197	208-230V/60/3	4.3	16.0	N/A	315 Lbs.

*The KM-1301SAH3, KM-1301SRH and KM-1301SRH3 are ENERGY STAR qualified.
(-P) Exterior fasteners are tamper proof torx pin screws

Rated @ 90" Air / 70" Water

KM-1340M SERIES | 30"W X 27 3/8"D X 41 1/2"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



B-500

30	x	32 1/2	x	87 1/2
Wide		Deep		High



B-700

44	x	32 1/2	x	87 1/2
Wide		Deep		High



B-800

48	x	32 1/2	x	87 1/2
Wide		Deep		High



B-900

52	x	32 1/2	x	87 1/2
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1340MAH	Air-Cooled	1167	208-230V/60/1*	4.7	18.3	N/A	315 Lbs.
KM-1340MWH	Water-Cooled	1316	208-230V/60/1*	3.9	19.7	133	293 Lbs.
KM-1340MRH *	Remote A-C	1251	208-230V/60/1*	4.5	18.3	N/A	289 Lbs.

*The KM-1340MRH is ENERGY STAR qualified.

*3 wire with neutral for 115V


Rated @ 90" Air / 70" Water

CUBER SERIES



KM CRESCENT CUBERS


KM-1601M SERIES | 30"W X 27 3/8"D X 41 11/16"H (ice machine dimensions only)



CEC Compliant



Rated in accordance with ARI Standard 810-95



30	x	32 1/2	x	87 1/2
Wide		Deep		High

44	x	32 1/2	x	87 1/2
Wide		Deep		High

48	x	32 1/2	x	87 1/2
Wide		Deep		High

52	x	32 1/2	x	87 1/2
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1601MRH	Remote A-C	1417	208-230V/60/1*	4.64	18.6	N/A	316 Lbs.
KM-1601MRH3 *	Remote A-C	1391	208-230V/60/3	4.55	19.2	N/A	316 Lbs.

*The KM-1601MRH3 is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water



KM-1601S SERIES | 48"W X 27 3/8"D X 27 3/8"H (ice machine dimensions only)



CEC Compliant



Rated in accordance with ARI Standard 810-95



48	x	32 1/2	x	73 3/8
Wide		Deep		High

48	x	32 1/2	x	101 3/4
Wide		Deep		High

52	x	32 1/2	x	73 3/8
Wide		Deep		High

52	x	32 1/2	x	101 3/4
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1601SWH	Water-Cooled	1523	208-230V/60/1*	3.8	24.5	98	360 Lbs.
KM-1601SWH3	Water-Cooled	1565	208-230V/60/3	3.66	23.8	100	360 Lbs.
KM-1601SRH	Remote A-C	1490	208-230V/60/1*	4.36	23.6	N/A	350 Lbs.
KM-1601SRH3	Remote A-C	1498	208-230V/60/3	4.46	23.2	N/A	350 Lbs.

*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

KM-1900S SERIES | 48"W X 27 3/8"D X 36 7/16"H (ice machine dimensions only)



CEC Compliant



Rated in accordance with ARI Standard 810-95



48	x	32 1/2	x	82 7/16
Wide		Deep		High

48	x	32 1/2	x	119 7/8
Wide		Deep		High

52	x	32 1/2	x	82 7/16
Wide		Deep		High

52	x	32 1/2	x	119 7/8
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1900SAH(-P) *	Air-Cooled	1560	208-230V/60/1*	4.1	18.8	N/A	415 Lbs.
KM-1900SAH3 *	Air-Cooled	1530	208-230V/60/3	4.1	17.0	N/A	415 Lbs.
KM-1900SWH(-P)	Water-Cooled	1826	208-230V/60/1*	3.24	16.1	98	415 Lbs.
KM-1900SWH3	Water-Cooled	1814	208-230V/60/3	3.3	18.8	99	415 Lbs.
KM-1900SRH *	Remote A-C	1640	208-230V/60/1*	4.09	20.0	N/A	415 Lbs.
KM-1900SRH3	Remote A-C	1650	208-230V/60/3	4.04	20.9	N/A	415 Lbs.

*The KM-1900SAH, KM-1900SAH-P, KM-1900SAH3 and KM-1900SRH are ENERGY STAR qualified. *3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

(-P) Exterior fasteners are tamper proof torx pin screws



CUBER SERIES

KM CRESCENT CUBERS

KMH-2000S SERIES | 36"W X 40"D X 36 7/16"H (ice machine dimensions only)




Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMH-2000SWH	Water-Cooled	1760	208-230V/60/1*	3.30	17.5	84	415 Lbs.
KMH-2000SWH3	Water-Cooled	1840	208-230V/60/3	3.19	17.4	102	415 Lbs.
KMH-2000SRH *	Remote A-C	1694	208-230V/60/1*	3.80	18.1	N/A	415 Lbs.
KMH-2000SRH3 *	Remote A-C	1675	208-230V/60/3	3.70	16.8	N/A	415 Lbs.

*The KMH-2000SRH and KMH-2000SRH3 are ENERGY STAR qualified.

*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

KM-2100S SERIES | 48"W X 27 3/8"D X 36 7/16"H (ice machine dimensions only)


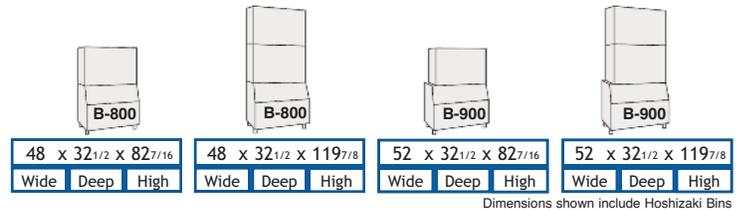


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-2100SWH3	Water-Cooled	2054	208-230V/60/3	3.18	16.9	95	440 Lbs.
KM-2100SRH3	Remote A-C	1810	208-230V/60/3	4.26	21.1	N/A	440 Lbs.

*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

KM-2500S SERIES | 48"W X 27 3/8"D X 36 7/16"H (ice machine dimensions only)

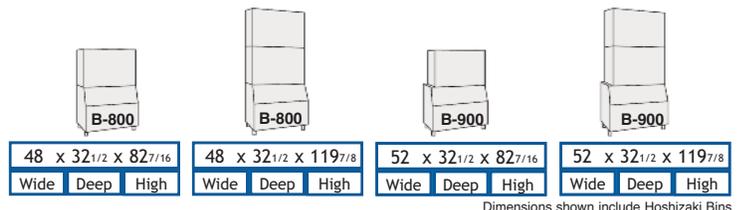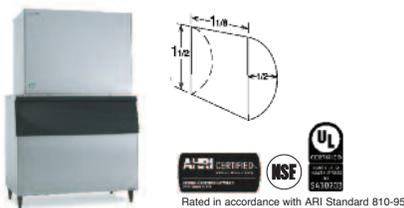

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-2500SWH3	Water-Cooled	2365	208-230V/60/3	3.54	17.2	127	415 Lbs.
KM-2500SRH3	Remote A-C	2235	208-230V/60/3	4.5	18.6	N/A	440 Lbs.

*3 wire with neutral for 115V


Rated @ 90° Air / 70° Water

CUBER SERIES



KM CRESCENT CUBERS - SERENITY SERIES

KMS-822MLH | 22"W X 24 5/8"D X 28"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95




22	30 1/2	35 3/8
Wide	Deep	High

22	24 5/8	28
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-822MLH	Remote A-C	774	115V/60/1	5.58	19.3	N/A	152 Lbs.

Rated @ 90° Air / 70° Water

KMS-830MLH | 30"W X 16 1/2"D X 29"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95




30	30 1/2	39 5/8
Wide	Deep	High

30	16 1/2	29
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-830MLH with SRK-8H	Remote A-C	700	115V/60/1	5.50	16.0	N/A	137 Lbs. ice machine only
KMS-830MLH with SRK-8H3	Remote A-C	690	115V/60/1	5.40	16.0	N/A	137 Lbs. ice machine only

Rated @ 90° Air / 70° Water

KMS-1122MLH | 22"W X 18"D X 31 1/4"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95




22	18	31 1/4
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-1122MLH* with SRK-12H	Remote A-C	985	115V/60/1	4.65	19.5	N/A	150 Lbs. ice machine only
KMS-1122MLH* with SRK-12H3	Remote A-C	1000	115V/60/1	4.6	19.5	N/A	150 Lbs. ice machine only

*The KMS-1122MLH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water

KMS-1401MLJ | 30"W X 24"D X 28"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



30	30 1/2	39 5/8
Wide	Deep	High

30	24	28
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-1401MLJ with SRK-14J	Remote A-C	1280	115V/60/1	4.70	19.5	N/A	177 Lbs. ice machine only
KMS-1401MLJ with SRK-14J3	Remote A-C	1280	115V/60/1	4.70	19.5	N/A	177 Lbs. ice machine only


Rated @ 90° Air / 70° Water



CUBER SERIES

KM CRESCENT CUBERS - SERENITY SERIES

KMS-2000MLH | 30"W X 24"D X 32 7/8"H (ice machine dimensions only)







30 x 30 1/2 x 39 5/8			30 x 24 x 32 7/8		
Wide	Deep	High	Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-2000MLH with SRK-20H	Remote A-C	1786	115V/60/1	4.70	22.0	N/A	206 Lbs. ice machine only
KMS-2000MLH with SRK-20H3	Remote A-C	1706	115V/60/1	4.65	23.3	N/A	206 Lbs. ice machine only

Rated @ 90° Air / 70° Water

KM CRESCENT CUBERS - MARINE APPLICATION

KM-1400S-M SERIES | 48"W X 27 3/8"D X 27 3/8"H (ice machine dimensions only)



48 x 32 1/2 x 73 3/8			48 x 32 1/2 x 101 3/4			52 x 32 1/2 x 73 3/8			52 x 32 1/2 x 101 3/4		
Wide	Deep	High	Wide	Deep	High	Wide	Deep	High	Wide	Deep	High

Dimensions shown include Hoshizaki Bins




Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1400SWH-M	Water-Cooled	1293	208-230V/60/1*	3.4	18.9	161	315 Lbs.
KM-1400SWH3-M	Water-Cooled	1255	208-230V/60/3	3.3	17.9	146	315 Lbs.

*2 wire

Rated @ 90° Air / 70° Water

IM SQUARE CUBER

IM-500S SERIES | 44"W X 27 5/8"D X 21 3/4"H (ice machine dimensions only)



44 x 32 1/2 x 67 3/4			44 x 32 1/2 x 89 1/2			48 x 32 1/2 x 67 3/4			48 x 32 1/2 x 89 1/2			52 x 32 1/2 x 67 3/4			52 x 32 1/2 x 89 1/2		
Wide	Deep	High															

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
IM-500SAA	Air-Cooled	435	115V/60/1	5.45	19.8	N/A	220 Lbs.

*The IM-500SAA is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


FLAKER / CUBELET SERIES



Features & Benefits of the Flaker / Cubelet Series



Flaked Ice



Cubelet Ice Dimensions

- Attractive stainless steel exterior
- Most models are available in both flaked and cubelet style ice
- The internal auger design produces the highest quality ice with fewer repairs and less down time
- The freezing cylinder is made from cast stainless steel
- The industry's only greaseless bearing design improves life of the machine
- **Hoshizaki Flaker and Cubelet** ice machines have electric water inlet valves and an automatic purge of water from the reservoir for cleaner operation and longer bearing life
- Features Advanced CleanCycle24™ design - a 2 second rinse every hour
- Self-contained flakers flush automatically when bin control is activated

FLAKED ICE USAGE GUIDE

Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Salad Bar/Seafood Display	30 lbs. ice per ft ³
Hospital	
Patient Care	10 lbs. ice per bed
Cafeteria	1 lb. ice per seat
Nursing Home	6 lbs. per bed



SELF-CONTAINED FLAKERS with Built-In Bins

F-300BAF | 36"W X 24"D X 39"H (*6" Legs Included)



Self-Contained Bin Storage Capacity

Up to 110 Lbs.



36 x 24 x 39*		
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-300BAF *	Air-Cooled	303	115V/60/1	4.8	12.0	N/A	210 Lbs.

*The F-300BAF is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

F-330BAH | 24"W X 26"D X 39"H (*6" Legs Included)



Self-Contained Bin Storage Capacity

Up to 80 Lbs.



24 x 26 x 39*		
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-330BAH *	Air-Cooled	330	115V/60/1	4.1	12.0	N/A	178 Lbs.

*The F-330BAH is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

F-500BAF | 38"W X 29"D X 42"H (*6" Legs Included)



Self-Contained Bin Storage Capacity

Up to 250 Lbs.



38 x 29 x 42*		
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-500BAF *	Air-Cooled	478	115V/60/1	4.3	12.0	N/A	270 Lbs.

*The F-500BAF is ENERGY STAR qualified.


Rated @ 70° Air / 50° Water




FLAKER / CUBELET SERIES

FLAKERS


F-450MAH | 22"W X 27 3/8"D X 21 7/8"H (ice machine dimensions only)




22	x	32 1/2	x	68
Wide		Deep		High




30	x	32 1/2	x	68
Wide		Deep		High



44	x	32 1/2	x	68
Wide		Deep		High



48	x	32 1/2	x	68
Wide		Deep		High




52	x	32 1/2	x	68
Wide		Deep		High

Dimensions shown include Hoshizaki Bins


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-450MAH	Air-Cooled	493	115V/60/1	5.35	12.0	N/A	175 Lbs.

Rated @ 70° Air / 50° Water


F-801M SERIES | 22"W X 27 3/8"D X 25 15/16"H (ice machine dimensions only)




22	x	32 1/2	x	71 1/4
Wide		Deep		High




30	x	32 1/2	x	71 1/4
Wide		Deep		High



44	x	32 1/2	x	71 1/4
Wide		Deep		High



48	x	32 1/2	x	71 1/4
Wide		Deep		High



52	x	32 1/2	x	71 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-801MAH *	Air-Cooled	823	115V/60/1	3.2	12.0	N/A	205 Lbs.
F-801MWH	Water-Cooled	584	115V/60/1	4.1	12.0	81.0	205 Lbs.


*The F-801MAH is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water


F-1001M SERIES | 22"W X 27 3/8"D X 25 15/16" J (ice machine dimensions only)




22	x	32 1/2	x	71 15/16
Wide		Deep		High




30	x	32 1/2	x	71 15/16
Wide		Deep		High



44	x	32 1/2	x	71 15/16
Wide		Deep		High



48	x	32 1/2	x	71 15/16
Wide		Deep		High



52	x	32 1/2	x	71 15/16
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1001MAJ *	Air-Cooled	970	115V/60/1	3.8	12.0	N/A	210 Lbs.
F-1001MWJ	Water-Cooled	890	115V/60/1	3.8	12.0	54.0	210 Lbs.
F-1001MRJ	Remote A-C	930	115V/60/1	4.1	12.0	N/A	210 Lbs.
F-1001MLJ	N/A	1150	115V/60/1	1.4	12.0	N/A	150 Lbs.

*The F-1001MAJ is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

FLAKER / CUBELET SERIES



FLAKERS

F-1501M SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)




30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1501MAH *	Air-Cooled	1590	208-230V/60/1*	4.03	12.0	N/A	325 Lbs.
F-1501MWH	Water-Cooled	1435	208-230V/60/1*	3.62	12.0	57	325 Lbs.
F-1501MRH *	Remote A-C	1585	208-230V/60/1*	3.85	12.0	N/A	315 Lbs.

*The F-1501MAH and F-1501MRH are ENERGY STAR qualified.


*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water


F-2001M SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)




30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-2001MWH	Water-Cooled	2030	208-230V/60/1*	3.68	12.0	70	342 Lbs.
F-2001MRH	Remote A-C	1990	208-230V/60/1*	4.19	12.0	N/A	360 Lbs.
F-2001MRH3	Remote A-C	2010	208-230V/60/1*	4.33	12.0	N/A	360 Lbs.
F-2001MLH	N/A	2280	115V/60/1	0.6	12.0	N/A	250 Lbs.

*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water


SELF-CONTAINED CUBELETS with Built-In Bins

C-101BAH | 14 7/8"W X 22 5/8"D X 33 1/2"H

Under Counter Unit



Self-Contained Bin Storage Capacity
Up to 29 Lbs.



UL approved for outdoor use



-DS shown with Custom Cabinetry



14 7/8	x	22 5/8	x	33 1/2
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
C-101BAH *	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.
C-101BAH-DS *	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.
C-101BAH-AD *†	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.
C-101BAH-ADDS *†	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.

*The C-101BAH-(DS) and C-101BAH-AD(DS) are ENERGY STAR qualified.

*The ADA compliant machine dimensions are 14 7/8" width x 22 5/8" depth x 31 1/2" height

†Designed to accommodate custom cabinetry

Rated @ 70° Air / 50° Water




FLAKER / CUBELET SERIES

SELF-CONTAINED CUBELETS with Built-In Bins

F-330BAH-C | 24"W X 26"D X 39"H (*6" Legs Included)



Self-Contained Bin Storage Capacity
Up to 80 Lbs.



24 x 26 x 39*		
Wide	Deep	High







Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-330BAH-C *	Air-Cooled	320	115V/60/1	4.5	12.0	N/A	178 Lbs.

*The F-330BAH-C is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

CUBELETS

F-450MAH-C | 22"W X 27 3/8"D X 21 7/8"H (ice machine dimensions only)



22 x 32 1/2 x 68	30 x 32 1/2 x 68	44 x 32 1/2 x 68	48 x 32 1/2 x 68	52 x 32 1/2 x 68
Wide Deep High				


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-450MAH-C	Air-Cooled	431	115V/60/1	6.31	12.0	N/A	175 Lbs.

*Not recommended for dispensing applications

Rated @ 70° Air / 50° Water

FD-650M-C SERIES | 22"W X 24"D X 26"H (ice machine dimensions only)



22 x 24 x 26		
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
FD-650MAH-C *	Air-Cooled	650	115V/60/1	5.35	12.0	N/A	205 Lbs.
FD-650MWH-C	Water-Cooled	615	115V/60/1	3.81	12.0	N/A	205 Lbs.
FD-650MRH-C *	Remote A-C	590	115V/60/1	4.75	12.0	N/A	205 Lbs.

*The FD-650MAH-C and FD-650MRH-C are ENERGY STAR qualified.



Rated @ 70° Air / 50° Water

FLAKER / CUBELET SERIES




CUBELETS


F-801M-C SERIES | 22"W X 27 3/8"D X 25 15/16"H (ice machine dimensions only)




22	x	32 1/2	x	71 1/4
Wide	Deep	High		




30	x	32 1/2	x	71 1/4
Wide	Deep	High		



44	x	32 1/2	x	71 1/4
Wide	Deep	High		



48	x	32 1/2	x	71 1/4
Wide	Deep	High		



52	x	32 1/2	x	71 1/4
Wide	Deep	High		



Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-801MAH-C *	Air-Cooled	752	115V/60/1	3.5	12.0	N/A	205 Lbs.
F-801MWH-C	Water-Cooled	556	115V/60/1	4.29	12.0	83.0	205 Lbs.


*The F-801MAH-C is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water


F-1001M-C SERIES | 22"W X 27 3/8"D X 25 15/16" J (ice machine dimensions only)




22	x	32 1/2	x	71 15/16
Wide	Deep	High		




30	x	32 1/2	x	71 15/16
Wide	Deep	High		



44	x	32 1/2	x	71 15/16
Wide	Deep	High		



48	x	32 1/2	x	71 15/16
Wide	Deep	High		




52	x	32 1/2	x	71 15/16
Wide	Deep	High		

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1001MAJ-C	Air-Cooled	910	115V/60/1	3.9	12.0	N/A	210 Lbs.
F-1001MWJ-C	Water-Cooled	790	115V/60/1	3.8	12.0	61.0	210 Lbs.
F-1001MRJ-C	Remote A-C	840	115V/60/1	4.6	12.0	N/A	210 Lbs.

Rated @ 70° Air / 50° Water

FD-1001M-C SERIES | 22"W X 24"D X 26" J (ice machine dimensions only)



30	x	11	x	26
Wide	Deep	High		

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
FD-1001MAJ-C *	Air-Cooled	940	115V/60/1	3.4	12.0	N/A	210 Lbs.
FD-1001MRJ-C	Remote A-C	930	115V/60/1	3.6	12.0	N/A	210 Lbs.

*The FD-1001MAJ-C is ENERGY STAR qualified.


Rated @ 70° Air / 50° Water



FLAKER / CUBELET SERIES

CUBELETS


F-1501M-C SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)



30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1501MAH-C	Air-Cooled	1300	208-230V/60/1*	5.36	12.0	N/A	325 Lbs.
F-1501MWH-C	Water-Cooled	1125	208-230V/60/1*	4.55	12.0	65	325 Lbs.
F-1501MRH-C *	Remote A-C	1335	208-230V/60/1*	4.35	12.0	N/A	315 Lbs.

*The F-1501MRH-C is ENERGY STAR qualified.


*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water


F-2001M-C SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)




30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-2001MRH-C	Remote A-C	1814	208-230V/60/1*	5.1	12.0	N/A	360 Lbs.

*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water

CUBELETS - SERENITY SERIES

FS-1001MLH-C - SERENITY SERIES | 30"W X 11"D X 26"H (ice machine dimensions only)



30	x	30 1/2	x	39 5/8
Wide		Deep		High



30	x	11	x	26
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs. 90/70	70/50	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
FS-1001MLH-C	Remote A-C	830	115V/60/1	5.96	4.94	12.0	N/A	166 Lbs.


Rated @ 70° Air / 50° Water

FLAKER / CUBELET SERIES



CUBELETS - SERENITY SERIES

FS-1022MLH-C - SERENITY SERIES | 22"W X 16 1/2"D X 26"H (ice machine dimensions only)



Lancer FS30

30	x	30 1/2	x	39 5/8
Wide		Deep		High




FS-1022MLH-C

22	x	16 1/2	x	26
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.		Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
				90/70	70/50			
FS-1022MLH-C	Remote A-C	830	115V/60/1	5.96	4.94	12.0	N/A	166 Lbs.

Rated @ 70° Air / 50° Water

FS-1500MLH-C - SERENITY SERIES | 30"W X 16 1/2"D X 33"H (ice machine dimensions only)



Lancer FS30

30	x	30 1/2	x	39 5/8
Wide		Deep		High



FS-1500MLH-C

30	x	16 1/2	x	33
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.		Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
				90/70	70/50			
FS-1500MLH-C	Remote A-C	1491	115V/60/1	4.51	3.75	12.0	N/A	222 Lbs.

Rated @ 70° Air / 50° Water





DISPENSER SERIES

DCM SERIES

DCM-270BAH | 16 9/16" W X 24 1/8" D X 31 11/16" H (*4" Legs Included - dispenser dimensions only)



Ice Bin Storage Capacity
Up to 9 Lbs.



16 9/16 X 24 1/8 X 31 11/16
Wide Deep High


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-270BAH	Air-Cooled	282	115V/60/1	5.5	12.0	N/A	165 Lbs.

Rated @ 70° Air / 50° Water

DCM-300BAH | 26" W X 22 1/2" D X 40" H (ice machine / dispenser dimensions only)



Ice Bin Storage Capacity
Up to 40 Lbs.



26 x 22 1/2 x 40
Wide Deep High



26 x 22 1/2 x 46
Wide Deep High

Floor Model with Optional Stand



26 x 22 1/2 x 72 1/2
Wide Deep High



Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-300BAH	Air-Cooled	321	115V/60/1	6.84	12.5	N/A	240 Lbs.

Rated @ 70° Air / 50° Water

DCM-500B | 26" W X 22 1/2" D X 40" H (ice machine / dispenser dimensions only)



Ice Bin Storage Capacity
Up to 40 Lbs.



26 x 22 1/2 x 40
Wide Deep High



26 x 22 1/2 x 46
Wide Deep High

Floor Model with Optional Stand



26 x 22 1/2 x 72 1/2
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-500BAH	Air-Cooled	618	115V/60/1	4.4	12.0	N/A	276 Lbs.
DCM-500BWH	Water-Cooled	567	115V/60/1	4.1	12.0	44.3	269 Lbs.

Rated @ 70° Air / 50° Water




DISPENSER SERIES

DCM SERIES


DCM-751B | 34 1/16"W X 28 1/2"D X 48 1/16"H (ice machine / dispenser dimensions only)



Ice Bin Storage Capacity
Up to 95 Lbs.



34 1/16 X 28 1/2 X 48 1/16
Wide Deep High



34 1/16 X 28 1/2 X 54 1/16
Wide Deep High



34 1/16 X 28 1/2 X 80 1/2
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-751BAH	Air-Cooled	801	115V/60/1	5.94	12.0	N/A	345 Lbs.
DCM-751BWH	Water-Cooled	800	115V/60/1	4.77	12.0	47.0	345 Lbs.

Rated @ 70° Air / 50° Water



DCM OPTI-SERVE™ SERIES

DCM-270BAH-OS | 16 9/16"W X 24 1/8"D X 31 1/16"H (*4" Legs Included - dispenser dimensions only)



OPTI-SERVE

Ice Bin Storage Capacity
Up to 9 Lbs.



16 9/16 X 24 1/8 X 31 1/16
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-270BAH-OS	Air-Cooled	288	115V/60/1	5.5	12.0	N/A	165 Lbs.

Rated @ 70° Air / 50° Water



****Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**

DCM-300BAH-OS | 26"W X 22 1/2"D X 40"H (ice machine / dispenser dimensions only)



OPTI-SERVE


Ice Bin Storage Capacity
Up to 40 Lbs.



26 X 22 1/2 X 40
Wide Deep High



26 X 22 1/2 X 46
Wide Deep High



26 X 22 1/2 X 72 1/2
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-300BAH-OS	Air-Cooled	321	115V/60/1	6.84	12.5	N/A	240 Lbs.

Rated @ 70° Air / 50° Water

****Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**



DISPENSER SERIES


DCM OPTI-SERVE™ SERIES

DCM-500B-OS | 26"W X 22 1/2"D X 40"H (ice machine / dispenser dimensions only)



OPTI-SERVE

Ice Bin Storage Capacity
Up to 40 Lbs.



Counter-Top



26 x 22 1/2 x 40
Wide Deep High

Counter-Top with Optional 6" Legs



26 x 22 1/2 x 46
Wide Deep High

Floor Model with Optional Stand



26 x 22 1/2 x 72 1/2
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-500BAH-OS	Air-Cooled	618	115V/60/1	4.4	12.0	N/A	276 Lbs.
DCM-500BWH-OS	Water-Cooled	567	115V/60/1	4.0	12.0	52.0	269 Lbs.

Rated @ 70° Air / 50° Water


****Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**

DCM-751B-OS | 34 1/16"W X 28 1/2"D X 48 1/16"H (ice machine / dispenser dimensions only)



OPTI-SERVE

Ice Bin Storage Capacity
Up to 95 Lbs.



Counter-Top




34 1/16 x 28 1/2 x 48 1/16
Wide Deep High

Counter-Top with Optional 6" Legs



34 1/16 x 28 1/2 x 54 1/16
Wide Deep High

Floor Model with Optional Stand



34 1/16 x 28 1/2 x 80 1/2
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-751BAH-OS	Air-Cooled	801	115V/60/1	5.94	12.0	N/A	345 Lbs.
DCM-751BWH-OS	Water-Cooled	800	115V/60/1	4.77	12.0	47.0	345 Lbs.

Rated @ 70° Air / 50° Water

****Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**

DISPENSER SERIES



Features & Benefits of Hoshizaki Dispensers


- Attractive stainless steel exterior provides long life and easy maintenance
- Crescent cube dispensers feature a built-in insulated storage bin with a “U”-shaped design
- Prevents clumping and three dimensional agitation assists in delivering ice conveniently
- **DB Series** accommodates KM Series cubers
- **DKM Hotel Dispenser** features the industries only one-piece design and is 35% quieter than other hotel dispensers
- **DCM Series** dispenses easy to chew cubelet ice and water
- Hoshizaki’s **DCM Opti-Serve™ Series** offers hands-free dispensing and helps eliminate the possibility of cross-contamination
- All dispensers feature built-in ice storage capacity

OPTI-SERVE



DB SERIES

DB-130H | 22"W X 30"D X 53"H (*6" Legs Included - dispenser dimensions only)



ALAMCO CERTIFIED
NSF
UL
Rated in accordance with ARI Standard 820-95



22 x 30 x 53
Wide Deep High

KM-320/461/515M Cuber sold separately



22 x 30 x 83^{5/16}
Wide Deep High


KM-600/650M Cuber sold separately



22 x 30 x 90^{1/2}
Wide Deep High

Model Number	Application Ice Storage Capacity	ARI-Rated Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker KWH per 100 lbs.	Shipping Weight
DB-130H	130 lbs.	90 lbs.	20 lbs. / min.	115V/60/1	N/A	215 Lbs.

DB-200H | 30"W X 30"D X 53"H (*6" Legs Included - dispenser dimensions only)



ALAMCO CERTIFIED
NSF
UL
Rated in accordance with ARI Standard 820-95



30 x 30 x 53
Wide Deep High

KML-250/351/451 Cuber sold separately



30 x 30 x 75
Wide Deep High

KML-631 Cuber sold separately



30 x 30 x 79
Wide Deep High

KM-461/515M Cuber sold separately



30 x 30 x 83^{5/16}
Wide Deep High

KM-600/650M Cuber sold separately



30 x 30 x 90^{1/2}
Wide Deep High

Model Number	Application Ice Storage Capacity	ARI-Rated Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker KWH per 100 lbs.	Shipping Weight
DB-200H	200 lbs.	140 lbs.	13 lbs. / min.	115V/60/1	N/A	240 Lbs.



DISPENSER SERIES

DKM SERENITY SERIES

DKM-500B_H | 30"W X 28"D X 77"H (*6" Legs Included)




30	x	28	x	77
Wide		Deep		High

Model Number	Lbs. of Ice per 24 hrs.	Application Ice Storage Capacity	ARI-Rated Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker KWH per 100 lbs.	Shipping Weight
DKM-500BAH *	466 lbs.	200 lbs.	140 lbs.	13 lbs. / min.	115V/60/1	6.53	410 Lbs.
DKM-500BWH	441 lbs.	200 lbs.	140 lbs.	13 lbs. / min.	115V/60/1	4.98	372 Lbs.

*The DKM-500BAH is ENERGY STAR qualified.


DM SERIES

DM-200B | 30"W X 28"D X 36 3/8"H (dispenser dimensions only)

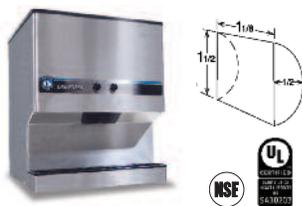

Counter-Top

Counter-Top with optional 4" legs



30	x	28	x	36 3/8
Wide		Deep		High

30	x	28	x	40 3/8
Wide		Deep		High


Model Number	Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker Production per 24 hrs.	Icemaker KWH per 100 lbs.	Shipping Weight
DM-200B	200 lbs.	7.5 lbs. / min.	115-120V/60/1	N/A	N/A	240 Lbs.

DISPENSER STAND SERIES

SD STANDS | (*6" Legs Included)



- Heavy duty stands for floor model ice machines/dispensers
- Attractive stainless steel exterior
- Easy cleaning and maintenance
- For **DM** and **DCM** Series Dispensers
- Locking doors standard (excluding SD-450 & 700)




SD - 200

30	x	28	x	32 13/16
Wide		Deep		High



SD - 270

16 1/2	x	24	x	35 3/16
Wide		Deep		High



SD - 450


26 1/4	x	22	x	32 1/2
Wide		Deep		High

Model Number	Use with Ice Machine / Dispenser Model	Shipping Weight
SD-200	DM-200B	125 lbs.
SD-270	DCM-270 (-OS)	95 lbs.
SD-450	DCM-300 (-OS) / DCM-500 (-OS)	110 lbs.
SD-500	DCM-300 (-OS) / DCM-500 (-OS)	100 lbs.
SD-700	DCM-751 (-OS)	165 lbs.
SD-750	DCM-751 (-OS)	125 lbs.



SD - 500

25 7/8	x	22	x	32 3/4
Wide		Deep		High



SD - 700

34 1/4	x	28 1/4	x	32 1/2
Wide		Deep		High



SD - 750

34	x	28	x	32 3/4
Wide		Deep		High

ICE STORAGE BINS



Hoshizaki Ice Storage Bins are available with either stainless steel or vinyl clad exterior for easy cleaning and long lasting attractive appearance. Sturdy construction for side-by-side or stacked installations, and non-corrosive bin liner provide safe, sanitary storage of ice cubes or flaked ice. Foamed-in-place polyurethane insulation in all bin walls, and bottom, provides dependable ice storage. The new baffle design increases ice accessibility by 30%. *H-GUARD Plus* Antimicrobial Agent adds extra protection to the storage bin and ice scoop.



ICE STORAGE BIN MODEL APPLICATION

Model Number	Application Storage Capacity	ARI Rated Storage Capacity	Dimensions w" x d" x h"	Shipping Weight
B-250PF	250 lbs.	230 lbs.	30" x 32 1/2" x 33 3/8"	130 lbs.
B-300PF / SF	300 lbs.	260 lbs.	22" x 32 1/2" x 46"	135 lbs.
BD-300PF / SF	300 lbs.	260 lbs.	22" x 32 1/2" x 46"	135 lbs.
B-500PF / SF	500 lbs.	360 lbs.	30" x 32 1/2" x 46"	155 lbs.
BD-500PF / SF	500 lbs.	360 lbs.	30" x 32 1/2" x 46"	155 lbs.
B-700PF / SF	700 lbs.	550 lbs.	44" x 32 1/2" x 46"	200 lbs.
B-800PF / SF	800 lbs.	600 lbs.	48" x 32 1/2" x 46"	210 lbs.
B-900PF / SF	900 lbs.	660 lbs.	52" x 32 1/2" x 46"	220 lbs.
B-1150SS	1150 lbs.	N/A	48" x 41" x 60"	345 lbs.
B-1300SS	1275 lbs.	N/A	48" x 41" x 66"	365 lbs.
B-1500SS	1500 lbs.	N/A	60" x 41" x 62"	395 lbs.
B-1650SS	1605 lbs.	N/A	60" x 41" x 66"	415 lbs.



B-500SF



B-1650SS

SS = stainless steel front, side, back and bottom

PF / SF SERIES BINS




B-250PF

30	x	32 1/2	x	33 3/8
Wide	Deep	High		




**B-300PF/SF
BD-300PF/SF**

22	x	32 1/2	x	46
Wide	Deep	High		




**B-500PF/SF
BD-500PF/SF**

30	x	32 1/2	x	46
Wide	Deep	High		



B-700PF/SF

44	x	32 1/2	x	46
Wide	Deep	High		



B-800PF/SF

48	x	32 1/2	x	46
Wide	Deep	High		



B-900PF/SF

52	x	32 1/2	x	46
Wide	Deep	High		

SS SERIES BINS



B-1150SS

48	x	41	x	60
Wide	Deep	High		



B-1300SS

48	x	41	x	66
Wide	Deep	High		



B-1500SS

60	x	41	x	62
Wide	Deep	High		



B-1650SS

60	x	41	x	66
Wide	Deep	High		



TOP KIT APPLICATION

ICE MACHINES

22" Width	22" Width	30" Width	30" Width	44" Width	44" Width	48" Width	60" Width
KM-320M	KMD-410M	KM-901M	KMD-450M	2 KM-320M	2 KMD-410M	KM-1301S	2 KM-901M**
KM-515M	KMS-822M	KM-1340M	KMD-850M	2 KM-515M	2 KM-822M	KM-1400S	2 KM-1340M
KM-600M	FD-650M-C	KM-1601M	KMD-901MRH	2 KM-600M	2 FD-650M-C	KM-1601S	2 KM-1601M
KM-650M	FD-1001M-C	KML Series	KMD-901MWH	2 KM-650M	2 FD-1001M-C	KM-1900S	2 KML Series
F-450M		F-1501M	KMS-1401M	IM-500S*		KM-2100S	2 F-1501M
F-801M		F-2001M	KMS-2000M	2 F-450M		KM-2500S	2 F-2001M
F-1001M				2 F-801M			2 KMD-850M
				2 F-1001M			2 KMD-901M

22" Width B-300PF/SF	NO TOP KIT NEEDED	N/A	N/A	N/A	N/A	N/A	N/A	N/A
30" Width B-250PF B-500PF/SF	NEED HS-2033	NEED HS-2033 & HS-2129	NO TOP KIT NEEDED	NEED HS-2129 NO TOP KIT NEEDED	N/A	N/A	N/A	N/A
44" Width B-700PF/SF	NEED HS-2035	NEED HS-2035 & HS-2130	NEED HS-2034	NEED HS-2130 & HS-2034	NO TOP KIT NEEDED	NEED HS-2130	N/A	N/A
48" Width B-800PF/SF	NEED HS-2035 & HS-2032	NEED HS-2035 & HS-2032/2131	NEED HS-2034 & HS-2032	NEED HS-2131 & HS-2034/2032	NEED HS-2032	NEED HS-2032 & HS-2131	NO TOP KIT NEEDED	N/A
48" Width B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED NEED HS-2147	N/A	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
52" Width B-900PF/SF	NEED HS-2035 & HS-2033	NEED HS-2035 & HS-2033/2132	NEED HS-2035	NEED HS-2132 & HS-2035	NEED HS-2033	NEED HS-2033 & HS-2132	NEED HS-2032	N/A
60" Width B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED NEED HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED *(N/A for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
30" Width DB-200H	NEED HS-2036 (DB-TOP KIT)	NEED HS-2036 (DB-TOP KIT) & HS-2148	NO TOP KIT NEEDED	HS-2148 (KMD-450 ONLY)	N/A	N/A	N/A	N/A

Any KMS* or FD on bin need Top Kit Extension:

- HS-2129 - for use with B-500 bins
- HS-2130 - for use with B-700 bins
- HS-2131 - for use with B-800 bins
- HS-2132 - for use with B-900 bins
- HS-2147 - for use with B-1150 & 1300 bins

*Excludes KMS-830MLH

BD Bin Applications - contact Factory

HS-2032 - 4" ABS Top Kit

HS-2033 - 8" ABS Top Kit

HS-2034 - 14" ABS Top Kit

HS-2035 - 22" ABS Top Kit

HS-2036 - (2) 4" ABS Top Kits


HS-2111 - 11.3" x 26.2" Stainless Cover/Separator

HS-2148 - 30" x 3.1" Stainless Cover

** HS-2160 - for use with 2 KM-901M

HCD ICE BAGGING SYSTEM SERIES

HCD SERIES

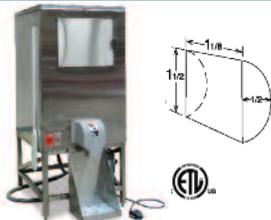

30	x	36	x	71
Wide		Deep		High

48	x	36	x	71
Wide		Deep		High

Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Shipping Weight
HCD-500B	647 lbs.	120 lbs. / min.	115V/60/1	510 Lbs.
HCD-1000B	1078 lbs.	120 lbs. / min.	115V/60/1	590 Lbs.

REMOTE CONDENSER SERIES



AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. **Remote Condensers** may be installed outdoors up to 55' from the icemaker. For installations exceeding 55', contact a Factory Technical Service Representative.



URC-5F
URC-9F
URC-14F
URC-22F
URC-23F

SRC-10H
SRC-14H




SRK-8H
SRK-10H
SRK-12H(3)

SRK shown without Legs

SRK-14J(3)
SRK-20H(3)

Remote Condenser Installation on Roof

For best performance allow 24" clearance for air circulation

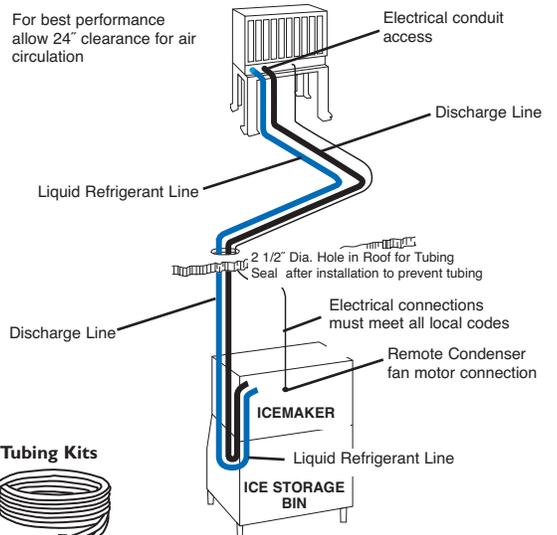

Ice maker and Storage Bin Sold Separately

Model Number	Ice Machine	Electrical	Shipping Weight	20' Length	35' Length	55' Length
URC-5F	KM-515MRH KM-650MRH FD-1001MRJ-C F-1001MRJ(-C)	115V/60/1	60 lbs.	R404-2046-2	R-404-3546-2	N/A
SRK-8H(3)	KMS-830MLH	208-230V/60/1	206 lbs.	25' - HS-0250 (Brazing Required)	35' - HS-0251 (Brazing Required)	55' - HS-0252 (Brazing Required)
URC-9F	KML-631MRH KMD-850MRH KM-901MRH(3) KMD-901MRH	115V/60/1	95 lbs.	R404-2068-2	R-404-3568-2	R-404-5568-2
SRC-10H	FS-1001MLH-C FS-1022MLH-C	208-230V/60/1	180 lbs.	R404-20410	R-404-35410	R-404-55410
SRK-10H	KMS-822MLH	208-230V/60/1	273 lbs.	25' - HS-0250 (Brazing Required)	35' - HS-0251 (Brazing Required)	55' - HS-0252 (Brazing Required)
SRK-12H(3)	KMS-1122MLH	208-230V/60/1(3)	275 lbs.	R404-20810	R-404-35810	R-404-55810
SRC-14H	FS-1500MLH-C	208-230V/60/1	235 lbs.	R404-20610	R-404-35610	R-404-55610
SRK-14J(3)	KMS-1401MLJ	208-230V/60/1(3)	275 lbs.	R404-20810	R-404-35810	R-404-55810
URC-14F	KM-1301SRH(3) KM-1340MRH F-1501MRH(-C)	115V/60/1	110 lbs.	R404-2068-2	R-404-3568-2	R-404-5568-2
SRK-20H(3)	KMS-2000MLH	208-230V/60/1	325 lbs.	25' - HS-0243 (Brazing Required)	35' - HS-0244 (Brazing Required)	55' - HS-0245 (Brazing Required)
URC-22F	KM-1601MRH(3) KM-1601SRH(3) KM-1900SRH(3) KM-2100SRH3 F-2000MRH(3) F-2001MRH(-C)	208-230V/60/1	210 lbs.	R404-20610	R-404-35610	R-404-55610
URC-23F	KM-2500SRH3	208-230V/60/1	210 lbs.	R404-20610	R-404-35610	R-404-55610



URC-5F

24 x 18¹/₈ x 32¹³/₁₆
 Wide Deep High




URC-9F

34⁵/₁₆ x 18¹/₈ x 36¹⁵/₁₆
 Wide Deep High



URC-14F

37¹³/₁₆ x 18¹/₈ x 37
 Wide Deep High



SRK-20H(3)

62 x 21 x 45
 Wide Deep High



SRK-8H(3)

35¹¹/₁₆ x 25³/₈ x 37
 Wide Deep High




SRC-10H

30¹/₄ x 25³/₈ x 34⁷/₈


SRC-14H

37⁷/₈ x 25¹/₂ x 37
 Wide Deep High



SRK-10H / SRK-12H(3)
SRK-14J(3)

52³/₈ x 19¹/₂ x 43
 Wide Deep High



URC-22F / URC-23F

46³/₈ x 17¹/₄ x 40¹/₂
 Wide Deep High



DISPLAY CASES


Features & Benefits of Hoshizaki Display Cases

- **HNC Sushi Cases** feature five models to choose from providing a wide selection for displaying
- Cases are refrigerated and contain a larger condenser face, improving cooling performance
- Self-contained refrigeration unit - ease of installation
- NSF approved thermometer



HNC SERIES

HNC SERIES



Refer to Chart Below

Wide	Deep	High
------	------	------

Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Electrical	Shipping Weight
HNC-120BA-R-S	Air-Cooled	Right Side	47 1/4 x 13 5/8 x 11	115V/60/1	90 Lbs.
HNC-120BA-L-S	Air-Cooled	Left Side	47 1/4 x 13 5/8 x 11	115V/60/1	90 Lbs.
HNC-150BA-R-S	Air-Cooled	Right Side	59 1/16 x 13 5/8 x 11	115V/60/1	105 Lbs.
HNC-150BA-L-S	Air-Cooled	Left Side	59 1/16 x 13 5/8 x 11	115V/60/1	105 Lbs.
HNC-180BA-R-S	Air-Cooled	Right Side	70 7/8 x 13 5/8 x 11	115V/60/1	120 Lbs.
HNC-180BA-L-S	Air-Cooled	Left Side	70 7/8 x 13 5/8 x 11	115V/60/1	120 Lbs.
HNC-210BA-R-S	Air-Cooled	Right Side	82 11/16 x 13 5/8 x 11	115V/60/1	135 Lbs.
HNC-210BA-L-S	Air-Cooled	Left Side	82 11/16 x 13 5/8 x 11	115V/60/1	135 Lbs.



Features & Benefits

Commercial Series Features

- Stainless steel exterior front and sides for long life, durability and easy maintenance
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- One piece, full length, extruded aluminum, flush mount door handle maximizes aisle space
- Solid state, digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Units are shipped with standard factory installed casters
- 79.63" High, cabinet will go through standard door opening



Professional Series Features

- Stainless steel interior and exterior for long life, durability and easy maintenance
- Energy efficient thermostatic expansion valve, self contained refrigeration system
- Innovative Variable Speed Compressor with "adaptive control" technology
- **EverCheck™** digital control system with audio alarms
- Rapid pull down and recovery times
- Self-closing stainless steel doors with torsion spring all metal hinges and locks
- Flush mounted door handle maximizes aisle space
- Hinged front panel for easy access to refrigeration system
- Removable, cleanable air filter protects condenser and reduces cleaning



Professional and Commercial Series Features

- Unique "ducted" air distribution system, achieves a uniform cabinet temperature even when full
- Cabinets and doors are insulated with 2 3/8" foamed in place polyurethane
- Exclusive "stepped" door design to protect recessed door gasket
- Shelves are adjustable in 1" increments, allowing maximum interior flexibility
- Field reversible doors (with optional kit)
- Enamel coated evaporator coil
- Automatic hot gas condensate disposable system, eliminates need for external drain
- Three year parts and labor warranty





REFRIGERATION SERIES

COMMERCIAL SERIES

REFRIGERATORS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet and doors are insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Doors are constructed of stainless steel exterior and interior
- 4" Heavy duty casters standard



	CRIB-FS(L)	CRIB-HS(L)	CR2B-FS	CR2B-HS	CR3B-FS	CR3B-HS
Nominal Storage Capacity	23.3 ft ³	23.3 ft ³	51.0 ft ³	51.0 ft ³	74.3 ft ³	74.3 ft ³
Interior Storage Capacity (CF) (AHAM)	21.0 ft ³	21.0 ft ³	47.0 ft ³	47.0 ft ³	68.2 ft ³	67.9 ft ³
Overall Width	27.5"	27.5"	55"	55"	83"	83"
Overall Depth	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
Height (including 4" casters)	79.63"	79.63"	79.63"	79.63"	79.63"	79.63"
Depth with doors open at 90°	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"
Interior Door opening width	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"
Interior Door opening height	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"
Adjustable Shelves	3	3	6	6	6 (L) / 3 (R)	6 (L) / 3 (R)
Shelf Dimensions (W x D)	21.5" x 26"	21.5" x 26"	23.9" x 24.6"	23.9" x 24.6"	(L) 23.9" x 24.6" (R) 21.25" x 26"	(L) 23.9" x 24.6" (R) 21.25" x 26"
Crated Shipping Weight	315 lbs.	315 lbs.	600 lbs.	600 lbs.	915 lbs.	915 lbs.
Crated Height	83"	83"	83"	83"	83"	83"
Crated Width	31.5"	31.5"	59"	59"	90.5"	90.5"
Crated Depth	39.5"	39.5"	39.5"	39.5"	39.5"	39.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	3.7	3.7	7.0	8.0	12.0	12.0
HACR Breaker	15.0	15.0	15.0	15.0	20.0	20.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	2.52	2.1	3.05	5.9	5.57	5.80
Heat Rejection (BTU / hr)	450	450	866	1226	866 (L) / 450 (R)	866 (L) / 450 (R)
Voltage Range	104 - 126	96 - 136	104 - 126	96 - 136	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F				
Control Set Point Range	34° - 52°F	30° - 50°F	34° - 52°F	30° - 50°F	34° - 52°F	34° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A

*CR1B-HS and CR2B-FS are ENERGY STAR qualified.

*Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



COMMERCIAL SERIES

REFRIGERATORS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet is insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Glass doors are energy efficient Multi Pane, Argon filled with Low-E non reflective coating and locks
- 4" Heavy duty casters standard



CR1B-FGY



CR2B-FGY



CR3B-FGY

Nominal Storage Capacity	23.3 ft ³	51.0 ft ³	74.3 ft ³
Interior Storage Capacity (CF) (AHAM)	20.9 ft ³	47.2 ft ³	68.2 ft ³
Overall Width	27.5"	55"	83"
Overall Depth	34.8"	34.8"	34.8"
Height (including 4" casters)	79.63"	79.63"	79.63"
Depth with doors open at 90°	60.5"	60.5"	60.5"
Interior Door opening width	22.8"	22.8"	22.8"
Interior Door opening height	59.6"	59.6"	59.6"
Adjustable Shelves	3	6	6 (L) / 3 (R)
Shelf Dimensions (W x D)	21.5" x 26"	23.9" x 24.6"	(L) 23.9" x 24.6" (R) 21.25" x 26"
Crated Shipping Weight	343 lbs.	656 lbs.	970 lbs.
Crated Height	83"	83"	83"
Crated Width	31.5"	59"	90.5"
Crated Depth	39.5"	39.5"	39.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage	4.1	6.2	10.3
HACR Breaker	15.0	15.0	20.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	3.12	4.97	5.57
Heat Rejection (BTU / hr)	626	1137	1890
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	34° - 52°F	34° - 52°F	34° - 52°F
Refrigerant	R-134A	R-134A	R-134A

*CR1B-FGY and CR2B-FGY are ENERGY STAR qualified.

*Based on 100°F ambient cycling at set point



REFRIGERATION SERIES

COMMERCIAL SERIES

FREEZERS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet and doors are insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Doors are constructed of stainless steel exterior and interior
- 4" Heavy duty casters standard



	CF1B-FS(L)	CF1B-HS(L)	CF2B-FS	CF2B-HS	CF3B-FS	CF3B-HS
Nominal Storage Capacity	23.3 ft ³	23.3 ft ³	51.0 ft ³	51.0 ft ³	74.3 ft ³	74.3 ft ³
Interior Storage Capacity (CF) (AHAM)	20.9 ft ³	21.0 ft ³	47.2 ft ³	47.0 ft ³	68.2 ft ³	67.9 ft ³
Overall Width	27.5"	27.5"	55"	55"	83"	83"
Overall Depth	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
Height (including 4" casters)	79.63"	79.63"	79.63"	79.63"	79.63"	79.63"
Depth with doors open at 90°	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"
Interior Door opening width	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"
Interior Door opening height	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"
Adjustable Shelves	3	3	6	6	6 (L) / 3 (R)	6 (L) / 3 (R)
Shelf Dimensions (W x D)	21.5" x 26"	23.9" x 24.6"	23.9" x 24.6"	23.9" x 24.6"	(L) 23.9" x 24.6" (R) 21.25" x 26"	(L) 23.9" x 24.6" (R) 21.25" x 26"
Crated Shipping Weight	315 lbs.	315 lbs.	600 lbs.	600 lbs.	915 lbs.	915 lbs.
Crated Height	83"	83"	83"	83"	83"	83"
Crated Width	31.5"	31.5"	59"	59"	90.5"	90.5"
Crated Depth	39.5"	39.5"	39.5"	39.5"	39.5"	39.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115/208-230/1	115/208-230/1
Amperage	9.5	9	11.1	11.1	16.0	16.0
HACR Breaker	15.0	15.0	15.0	15.0	20.0	20.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	5.95	6.8	11.46	11.8	17.41	18.23
Heat Rejection (BTU / hr)	1305	1635	2137	2137	2137(L) / 1305(R)	2137(L) / 1305(R)
Voltage Range	104 - 126	96 - 136	104 - 126	96 - 136	208 - 254	208 - 254
Ambient Temp. Range	45° - 100°F	45° - 100°F				
Control Set Point Range	-10° - +12°F	-10° - +10°F	-10° - +12°F	-10° - +10°F	-10° - +12°F	-10° - +12°F
Refrigerant	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A

*CF1B-FS, CF1B-HS, CF2B-FS and CF2B-HS are ENERGY STAR qualified.

**Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



COMMERCIAL SERIES

FREEZERS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet is insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Glass doors are energy efficient Triple Pane, Argon filled with Low-E non reflective coating and locks
- 4" Heavy duty casters standard



CF1B-FGY



CF2B-FGY

	CF1B-FGY	CF2B-FGY
Nominal Storage Capacity	23.3 ft ³	51.0 ft ³
Interior Storage Capacity (CF) (AHAM)	20.9 ft ³	47.2 ft ³
Overall Width	27.5"	55"
Overall Depth	34.8"	34.8"
Height (including 4" casters)	79.63"	79.63"
Depth with doors open at 90°	60.5"	60.5"
Interior Door opening width	22.8"	22.8"
Interior Door opening height	59.6"	59.6"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 26"	23.9" x 24.6"
Crated Shipping Weight	382 lbs.	600 lbs.
Crated Height	83"	83"
Crated Width	31.5"	59"
Crated Depth	39.5"	39.5"
Voltage	115V/60/1	115V/60/1
Amperage	9.0	9.8
HACR Breaker	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	8.68	13.73
Heat Rejection (BTU / hr)	1493	1952
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 80°F	45° - 80°F
Control Set Point Range	-10° to +12°F	-10° to +12°F
Refrigerant	R-404A	R-404A



REFRIGERATION SERIES

COMPACT UNDERCOUNTER SERIES

REFRIGERATOR

- Stainless steel exterior
- UL approval for outdoor use
- Energy efficient, one piece ABS interior liner
- Door is stainless steel exterior, aluminum interior and is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Built-in cabinet installation with louvered trim



HR24A

Interior Storage Capacity (CF) (AHAM)	4.0 ft ³
Overall Width	23.4"
Overall Depth	24.5"
Height (including 4" casters)	32.7"
Depth with doors open at 90°	46.4"
Interior Door opening width	18.1"
Adjustable Shelves	3
Shelf Dimensions (W x D)	(1) 19.13" x 11" (2) 19.13" x 16"
Voltage	115V/60/1
Amperage	2.0
HACR Breaker	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	0.378
Voltage Range	104 - 127
Ambient Temp. Range	60° - 95°F
Control Set Point Range	36° - 50°F
Refrigerant	R-134A

*HR24A is ENERGY STAR qualified.

*Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



COMMERCIAL SERIES - UNDERCOUNTERS

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door and drawers with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 4" Stem casters standard (2.25" casters - LP model)
- -01 - Door locks 27" & 48"



	CRMR27	CRMR27-LP	CRMR48	CRMR60	CRMR72
Nominal Storage Capacity	7.2 ft ³	7.2 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³	6.22 ft ³	11.95 ft ³	16.6 ft ³	19.7 ft ³
Overall Width	27"	27"	48"	60"	72"
Overall Depth	30"	30"	30"	30"	30"
Height (including 4" casters)	33.63"	32.3"	33.63"	33.63"	33.63"
Depth with doors open at 90°	54.5"	54.5"	51.5"	57.5"	51.5"
Interior Door opening width	22.6"	22.6"	19.5"	25.5"	19.5"
Interior Door opening height	22.9"	22.9"	22.9"	22.9"	22.9"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22.0" x 16.0"	22.0" x 16.0"	21.3" x 16.0"	27.3" x 15.9"	22.0" x 16.0"
Crated Shipping Weight	160 lbs.	160 lbs.	222 lbs.	268 lbs.	312 lbs.
Crated Height	36.5"	36.5"	36.5"	36.75"	36.5"
Crated Width	31.5"	31.5"	52.5"	62"	74"
Crated Depth	34"	34"	34"	34"	34"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	2.6	2.6	2.6	4.2	2.6
HACR Breaker	15.0	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	.65	.65	1.44	2.15	2.84
Heat Rejection (BTU / hr)	180	180	327	414	539
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A	R-134A

*CRMR27, CRMR27-LP and CRMR48 are ENERGY STAR qualified.



REFRIGERATION SERIES

COMMERCIAL SERIES - UNDERCOUNTERS with DRAWERS

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard



CRMR27-D



CRMR48-D4



CRMR60-D4



CRMR72-D6

	CRMR27-D	CRMR48-D4	CRMR60-D4	CRMR72-D6
Nominal Storage Capacity	7.2 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³	11.95 ft ³	16.6 ft ³	19.7 ft ³
Overall Width	27"	48"	60"	72"
Overall Depth	30"	30"	30"	30"
Height (incl. 4" casters)	33.63"	33.63"	33.63"	33.63"
Depth with drawer fully open	43.25"	43.25"	50.1"	43.25"
Drawer opening width	22.6"	19.5"	25.5"	19.5"
Drawer opening height	22.9"	22.9"	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	N/A	N/A	N/A	N/A
Crated Shipping Weight	176 lbs.	262 lbs.	308 lbs.	372 lbs.
Crated Height	36.5"	36.5"	36.75"	36.75"
Crated Width	31.5"	52.5"	62"	74"
Crated Depth	34"	34"	34"	34"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	2.6	2.6	4.2	4.2
HACR Breaker	15.0	15.0	15.0	15.0
Energy Consumption (kwh 7 day) ENERGY STAR/DOE/NSF	1.4	2.3	2.15	4.5
Heat Rejection (BTU / hr)	202.8	327	473.5	647
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A

REFRIGERATION SERIES



COMMERCIAL SERIES - UNDERCOUNTERS

FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 4" Stem casters standard (2.25" casters - LP model)
- -01 - Door locks 27" & 48"



CRMF27

CRMF27-LP

CRMF48

CRMF60

Nominal Storage Capacity	7.2 ft ³	7.2 ft ³	13.66 ft ³	17.55 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³	6.22 ft ³	11.95 ft ³	16.6 ft ³
Overall Width	27"	27"	48"	60"
Overall Depth	30"	30"	30"	30"
Height (incl. 4" casters, -LP 2.25")	33.63"	32.3"	33.63"	33.63"
Depth with doors open at 90°	54.5"	54.5"	51.5"	57.5"
Interior Door opening width	22.6"	22.6"	19.5"	25.5"
Interior Door opening height	22.9"	22.9"	22.9"	22.9"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22.0" x 16.0"	22.0" x 16.0"	21.3" x 16.0"	27.3" x 15.9"
Crated Shipping Weight	160 lbs.	160 lbs.	238 lbs.	268 lbs.
Crated Height	36.5"	36.5"	36.5"	36.5"
Crated Width	31.5"	31.5"	52.5"	62"
Crated Depth	34"	34"	34"	34"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	3.4	3.4	6.0	6.0
HACR Breaker	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	2.66	2.66	4.34	4.86
Heat Rejection (BTU / hr)	442	442	820	821
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-18° - +10°F	-18° - +10°F	-18° - +10°F	-10° - +10°F
Refrigerant	R-134A	R-134A	R-134A	R-134A

*CRMF27, CRMF27-LP, CRMF48 and CRMF60 are ENERGY STAR qualified.



REFRIGERATION SERIES

COMMERCIAL SERIES - UNDERCOUNTER with DRAWERS

FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard



CRMF27-D

Nominal Storage Capacity	7.2 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³
Overall Width	27"
Overall Depth	30"
Height (incl. 4" casters)	33.63"
Depth with drawer fully open	43.25"
Drawer opening width	22.6"
Drawer opening height	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer
Pan Capacity (# of 1/6 size x 4" deep)	N/A
Crated Shipping Weight	176 lbs.
Crated Height	36.5"
Crated Width	31.5"
Crated Depth	34"
Voltage	115V/60/1
Amperage	3.4
HACR Breaker	15.0
Energy Consumption (kwh / day) ENERGY STAR/DOE/NSF	3.9
Heat Rejection (BTU / hr)	560
Voltage Range	104 - 126
Ambient Temp. Range	45° - 100°F
Temperature Range	-18° - +10°F
Refrigerant	R-134A

REFRIGERATION SERIES



COMMERCIAL SERIES - WORKTOPS

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 6" Stem casters standard
- -01 - Door locks 27" & 48"



CRMR27-W

CRMR48-W

CRMR60-W

CRMR72-W

	CRMR27-W	CRMR48-W	CRMR60-W	CRMR72-W
Nominal Storage Capacity	7.2 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³	11.95 ft ³	16.6 ft ³	19.7 ft ³
Overall Width	27"	48"	60"	72"
Overall Depth	30"	30"	30"	30"
Height (including 6" casters)	40"	40"	40"	40"
Depth with doors open at 90°	54.5"	51.5"	57.5"	51.5"
Interior Door opening width	22.6"	19.5"	25.5"	19.5"
Interior Door opening height	22.9"	22.9"	22.9"	22.9"
Adjustable Shelves	1	2	2	3
Shelf Dimensions (W x D)	22.8" x 16.0"	21.3" x 16.0"	27.3" x 15.9"	22.0" x 16.0"
Crated Shipping Weight	156 lbs.	222 lbs.	272 lbs.	317 lbs.
Crated Height	40.5"	40.5"	40.75"	40.5"
Crated Width	31.5"	52.5"	62"	74"
Crated Depth	34"	34"	34"	34"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	2.6	2.6	4.2	2.6
HACR Breaker	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	.65	1.44	2.15	4.2
Heat Rejection (BTU / hr)	180	327	414	539
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A

*CRMR27-W and CRMR48-W are ENERGY STAR qualified.



REFRIGERATION SERIES

COMMERCIAL SERIES - WORKTOPS with DRAWERS

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawer with ABS interior liner
- Cabinet and drawers are insulated with 2" of foamed in place polyurethane
- 6" Stem casters standard



CRMR27-WD

CRMR48-WD4

CRMR60-WD4

CRMR72-WD6

	CRMR27-WD	CRMR48-WD4	CRMR60-WD4	CRMR72-WD6
Nominal Storage Capacity	7.2 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³	11.95 ft ³	16.6 ft ³	19.7 ft ³
Overall Width	27"	48"	60"	72"
Overall Depth	30"	30"	30"	30"
Height (incl. 6" casters)	40"	40"	40"	40"
Depth with drawer fully open	43.25"	43.25"	50.1"	43.25"
Drawer opening width	22.6"	19.5"	25.5"	19.5"
Drawer opening height	22.9"	22.9"	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	N/A	N/A	N/A	N/A
Crated Shipping Weight	176 lbs.	263 lbs.	312 lbs.	377 lbs.
Crated Height	40.5"	40.5"	40.75"	40.75"
Crated Width	31.5"	52.5"	62"	74"
Crated Depth	34"	34"	34"	34"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	2.6	2.6	4.2	4.2
HACR Breaker	15.0	15.0	15.0	15.0
Energy Consumption (kwh 7 day) ENERGY STAR/DOE/NSF	1.4	2.3	2.15	4.5
Heat Rejection (BTU / hr)	202.8	327	473.5	647
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A

REFRIGERATION SERIES



COMMERCIAL SERIES - WORKTOPS

FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 6" Stem casters standard
- -01 - Door locks 27" & 48"



CRMF27-W



CRMF48-W



CRMF60-W

Nominal Storage Capacity	7.2 ft ³	13.66 ft ³	17.55 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³	11.95 ft ³	16.6 ft ³
Overall Width	27"	48"	60"
Overall Depth	30"	30"	30"
Height (including 6" casters)	40"	40"	40"
Depth with doors open at 90°	54.5"	51.5"	57.5"
Interior Door opening width	22.6"	19.5"	25.5"
Interior Door opening height	22.9"	22.9"	22.9"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22.8" x 16.0"	21.3" x 16.0"	27.3" x 15.9"
Crated Shipping Weight	160 lbs.	238 lbs.	272 lbs.
Crated Height	40.5"	40.5"	40.5"
Crated Width	31.5"	52.5"	62"
Crated Depth	34"	34"	34"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage	3.4	6.0	6.0
HACR Breaker	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	2.66	4.34	4.86
Heat Rejection (BTU / hr)	442	820	821
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-18° - +10°F	20° - 52°F	-10° - +10°F
Refrigerant	R-134A	R-134A	R-134A

*CRMF27-W, CRMF48-W and CRMF60-W are ENERGY STAR qualified.



REFRIGERATION SERIES

COMMERCIAL SERIES - WORKTOPS with DRAWERS

FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawer with ABS interior liner
- Cabinet and drawers are insulated with 2" of foamed in place polyurethane
- 6" Stem casters standard



CRMF27-WD

Nominal Storage Capacity	7.2 ft ³
Interior Storage Capacity (CF) (AHAM)	6.22 ft ³
Overall Width	27"
Overall Depth	30"
Height (including 6" casters)	40"
Depth with drawer fully open	43.25"
Drawer opening width	22.6"
Drawer opening height	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer
Pan Capacity (# of 1/6 size x 4" deep)	N/A
Crated Shipping Weight	176 lbs.
Crated Height	40.5"
Crated Width	31.5"
Crated Depth	34"
Voltage	115V/60/1
Amperage	3.4
HACR Breaker	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	3.9
Heat Rejection (BTU / hr)	560
Voltage Range	104 - 126
Ambient Temp. Range	45° - 100°F
Temperature Range	-18° - +10°F
Refrigerant	R-134A



REFRIGERATION SERIES

COMMERCIAL SERIES - PREP TABLES - SANDWICH TOP

REFRIGERATORS

- Stainless steel exterior front, sides and top
 - Stainless steel exterior door with ABS interior liner
 - Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
 - Field reversible door
 - Provided with full complement of polycarbonate plastic 1/6th size pans
 - 6" Stem casters standard
- (-8) - 8 Pan capacity, 4" deep
 - (-12) - 12 Pan capacity, 4" deep



CRMR27-8D



CRMR48-12D4

Nominal Storage Capacity	7.2 ft ³	13.66 ft ³
Overall Width	27"	48"
Overall Depth	30"	30"
Height (including 6" casters)	45.2"	45.2"
Depth with Cutting Board installed	30.7"	30.7"
Depth with drawer fully open	43.25"	43.25"
Drawer opening width	22.6"	19.5"
Drawer opening height	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	205 lbs.	262 lbs.
Crated Height	45.1"	45.1"
Crated Width	31.5"	52.5"
Crated Depth	34"	34"
Voltage	115V/60/1	115V/60/1
Amperage	2.6	2.9
HACR Breaker	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR/DOE	1.6	4.0
Heat Rejection (BTU / hr)	230	567
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A

REFRIGERATION SERIES



COMMERCIAL SERIES - PREP TABLES - MEGA TOP

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 6" Stem casters standard
- (-12M) - 12 Pan capacity, 4" deep
- (-24M) - 24 Pan capacity, 4" deep
- 60"x10"x1/2" thick polyethylene cutting board is standard for CRMR-60-18M / -24M
- 72"x10"x1/2" thick polyethylene cutting board is standard for CRMR-72-18M / -24M / -30M
- (-18M) - 18 Pan capacity, 4" deep
- (-30M) - 30 Pan capacity, 4" deep



	CRMR27-12M	CRMR48-12M / -18M	CRMR60-12M / -18M / -24M	CRMR72-18M / -24M / -30M
Nominal Storage Capacity	7.2 ft ³	13.66 ft ³	13.66 ft ³	17.55 ft ³ 17.55 ft ³ 17.55 ft ³ 21.25 ft ³ 21.25 ft ³ 21.25 ft ³
Overall Width	27"	48"	48"	60" 60" 60" 72" 72" 72"
Overall Depth	30"	30"	30"	30" 30" 30" 31" 31" 31"
Height (including 6" casters)	45.2"	45.2"	45.2"	45.2" 45.2" 45.2" 45.2" 45.2" 45.2"
Depth with Cutting Board installed	30.7"	35.3"	35.3"	35.3" 35.3" 35.3" 35.3" 35.3" 35.3"
Depth with doors open at 90°	54.5"	51.5"	51.5"	51.5" 51.5" 51.5" 51.5" 51.5" 51.5"
Interior Door opening width	22.75"	19.5"	19.5"	25.5" 25.5" 25.5" 19.5" 19.5" 19.5"
Interior Door opening height	22.9"	22.9"	22.9"	22.9" 22.9" 22.9" 22.9" 22.9" 22.9"
Adjustable Shelves	1	2	2	2 2 2 3 3 3
Shelf Dimensions (W x D)	22.0" x 16.0"	21.3" x 16.0"	21.3" x 16.0"	22" x 15.9"
Crated Shipping Weight	185 lbs.	260 lbs.	260 lbs.	323 lbs. 323 lbs. 323 lbs. 375 lbs. 375 lbs. 375 lbs.
Crated Height	45.1"	45.1"	45.1"	45.1" 45.1" 45.1" 45.7" 45.7" 45.7"
Crated Width	31.5"	52.5"	52.5"	64.5" 64.5" 64.5" 74" 74" 74"
Crated Depth	34"	34"	34"	34" 34" 34" 34" 34" 34"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1 115V/60/1 115V/60/1 115V/60/1 115V/60/1 115V/60/1
Amperage	2.6	2.9	2.9	5.5 5.5 5.5 5.5 5.5 5.5
HACR Breaker	15.0	15.0	15.0	15.0 15.0 15.0 15.0 15.0 15.0
Energy Consumption (kwh / day) ENERGY STAR/DOE	2.6	4.0	4.0	4.2 4.2 4.2 6.54 6.54 6.54
Heat Rejection (BTU / hr)	540	567	567	597.5 597.5 597.5 929 929 929
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126 104 - 126 104 - 126 104 - 126 104 - 126 104 - 126
Ambient Temp. Range	45° - 86°F	45° - 100°F	45° - 100°F	45° - 86°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A R-134A R-134A R-134A R-134A R-134A



REFRIGERATION SERIES

COMMERCIAL SERIES - PREP TABLES - MEGA TOP

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawer with stainless steel interior liner
- Cabinet and drawers are insulated with 2" of CFC free, foamed in place polyurethane
- Enamel coated evaporator coil
- Standard with 6" stem casters (two with brakes)

- 27"x10"x1/2" thick white polyethylene cutting board is standard



CRMR27-12MD

- 48" x 10" x 1/2" thick white polyethylene cutting board is standard



CRMR48-18MD4

Nominal Storage Capacity	7.2 ft ³	13.66 ft ³
Overall Width	27"	48"
Overall Depth	30"	30"
Height (including 6" casters)	45.2"	45.2"
Depth with Cutting Board installed	37.3"	35.3"
Depth with drawer fully open	49.25"	43.25"
Drawer opening width	22.6"	19.5"
Drawer opening height	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)
Crated Shipping Weight	205 lbs.	262 lbs.
Crated Height	45.1"	45.1"
Crated Width	31.5"	52.5"
Crated Depth	34"	34"
Voltage	115V/60/1	115V/60/1
Amperage	2.6	2.9
HACR Breaker	15.0	15.0
*Energy Consumption (kwh / day) ENERGY STAR/DOE	1.6	4.0
*Heat Rejection (BTU / hr)	230	567
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F
Temperature Range	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A

REFRIGERATION SERIES



COMMERCIAL SERIES - PREP TABLES - PIZZA

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Field reversible door
- 6" Stem casters standard



CPT46

CPT67

CPT93

	CPT46	CPT67	CPT93
Nominal Storage Capacity	11.0 ft ³	19.9 ft ³	30.1 ft ³
Overall Width	46"	67"	93"
Overall Depth	32.24"	32.24"	32.24"
Height (including 6" casters)	43.45"	43.45"	43.45"
Depth with doors open at 90°	57.71"	57.71"	57.71"
Interior Door opening width	22.6"	22.6"	22.6"
Interior Door opening height	22.9"	22.9"	22.9"
Adjustable Shelves	2	4	6
Shelf Dimensions (W x D)	22.0" x 15.9"	24.8" x 25.61"	24.8" x 25.61"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	283 lbs.	400 lbs.	628 lbs.
Crated Height	44.25"	44.25"	44.25"
Crated Width	47.75"	68.75"	94.75"
Crated Depth	33.75"	33.75"	33.75"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage	5.5	5.5	5.5
HACR Breaker	15.0	15.0	15.0
Energy Consumption (kwh 7 day) @NSF	3.2	5.0	5.5
Heat Rejection (BTU / hr)	454	778	775.3
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F	45° - 86°F
Control Set Point Range	28° - 45°F	28° - 45°F	28° - 45°F
Refrigerant	R-134A	R-134A	R-134A



REFRIGERATION SERIES

COMMERCIAL SERIES - PIZZA TABLES with DRAWERS

REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawers with stainless steel interior liner
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Standard with 6" casters (two with brakes)

- 67" x 19" x 1/2" thick white polyethylene cutting board is standard



CPT46-D



CPT67-D4

Nominal Storage Capacity	11.0 ft ³	19.9 ft ³
Overall Width	46"	67"
Overall Depth	32.24"	32.24"
Height (including 6" casters)	43.45"	43.45"
Depth with Cutting Board installed	35.17"	35.17"
Depth with drawer fully open	58.24"	58.24"
Drawer opening width	22.59"	22.59"
Drawer opening height	22.92"	22.92"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	9
Crated Shipping Weight	325 lbs.	387 lbs.
Crated Height	44.25"	44.25"
Crated Width	47.75"	68.75"
Crated Depth	33.75"	33.75"
Voltage	115V/60/1	115V/60/1
Amperage	3.7	5.5
HACR Breaker	15.0	15.0
*Energy Consumption (kwh / day) ENERGY STAR/DOE	4.3	6.0
*Heat Rejection (BTU / hr)	605	848
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F
Control Setpoint Range	28° - 45°F	28° - 45°F
Refrigerant	R-134A	R-134A

REFRIGERATION SERIES



PROFESSIONAL SERIES

REFRIGERATORS

- Stainless steel interior and exterior
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Innovative Variable Speed Compressor with "adaptive control" technology
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



RH1-SSE-FS RH1-SSE-HS RH2-SSE-FS RH2-SSE-HS RH3-SSE-FS RH3-SSE-HS

	RH1-SSE-FS	RH1-SSE-HS	RH2-SSE-FS	RH2-SSE-HS	RH3-SSE-FS	RH3-SSE-HS
Interior Storage Capacity	22.3 ft ³⁰	22.3 ft ³	48.0 ft ³	48.0 ft ³	74.0 ft ³	74.0 ft ³
Overall Width	27.5"	27.5"	56"	56"	82.5"	82.5"
Overall Depth	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
Height (including 4" casters)	82.5"	82.5"	82.5"	82.5"	82.5"	82.5"
Depth with doors open at 90°	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	3	6	6	9	9
Center Shelves	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	400 lbs.	400 lbs.	625 lbs.	625 lbs.	825 lbs.	825 lbs.
Crated Height	85"	85"	85"	85"	85"	85"
Crated Width	32"	32"	59"	59"	87"	87"
Crated Depth	38"	38"	38"	38"	38"	38"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	4.3	4.3	6.0	6.0	7.1	7.1
HACR Breaker	15.0	15.0	15.0	15.0	15.0	15.0
Energy Consumption. (kwh / day) ENERGY STAR / DOE	2.1	1.9	3.4	3.9	4.3	4.3
Heat Rejection (BTU / hr)	582	582	938	938	2,085	2,085
Voltage Range	80 - 140	80 - 140	80 - 140	80 - 140	80 - 140	80 - 140
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
Refrigerant	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A

*RH1-SSE-FS, RH1-SSE-HS, RH2-SSE-FS, RH3-SSE-FS and RH3-SSE-HS are ENERGY STAR qualified.

*Based on 100°F ambient cycling at set point



REFRIGERATION SERIES

PROFESSIONAL SERIES

REFRIGERATORS

- Stainless steel interior and exterior
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Innovative Variable Speed Compressor with "adaptive control" technology
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



RH1-SSE-FG RH1-SSE-HG RH2-SSE-FG RH2-SSE-HG RH3-SSB-FG RH3-SSB-HG

Interior Storage Capacity	22.3 ft ³	22.3 ft ³	48.0 ft ³	48.0 ft ³	74.0 ft ³	73.6 ft ³
Overall Width	27.5"	27.5"	56"	56"	82.5"	82.5"
Overall Depth	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
Height (including 4" casters)	82.5"	82.5"	82.5"	82.5"	82.5"	82.5"
Depth with doors open at 90°	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	3	6	6	9	9
Center Shelves	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"					
Crated Shipping Weight	400 lbs.	400 lbs.	625 lbs.	625 lbs.	825 lbs.	825 lbs.
Crated Height	85"	85"	85"	85"	85"	85"
Crated Width	32"	32"	59"	59"	87"	87"
Crated Depth	38"	38"	38"	38"	38"	38"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	4.3	4.3	6.0	6.0	11.8	14.0
HACR Breaker	15.0	15.0	15.0	15.0	20.0	20.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	3.7	3.0	5.6	3.9	3.7	5.6
Heat Rejection (BTU / hr)	655	655	981	981	2,080	2,080
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F					
Control Set Point Range	+36° - +50°F					
Refrigerant	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A

*RH2-SSE-FG, RH2-SSE-HG and RH3-SSB-FG are ENERGY STAR qualified.

*Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



PROFESSIONAL SERIES

FREEZERS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



FHI-SSB

FHI-SSB-HD

FH2-SSB

FH2-SSB-HD

	FHI-SSB	FHI-SSB-HD	FH2-SSB	FH2-SSB-HD
Interior Storage Capacity	22.3 ft ³	22.3 ft ³	48.0 ft ³	48.0 ft ³
Overall Width	27.5"	27.5"	55"	55"
Overall Depth	33.6"	33.6"	33.6"	33.6"
Height (including 4" casters)	82.5"	82.5"	82.5"	82.5"
Depth with doors open at 90°	58.5"	58.5"	58.5"	58.5"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	3	6	6
Center Shelves	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	400 lbs.	400 lbs.	650 lbs.	650 lbs.
Crated Height	85"	85"	85"	85"
Crated Width	32"	32"	59"	59"
Crated Depth	38"	38"	38"	38"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	11.0	11.0	15.5	15.5
HACR Breaker	15.0	15.0	20.0	20.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	9.0	9.7	15.9	17.4
Heat Rejection (BTU / hr)	2100	2100	3415	3415
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +25°F	-10° - +25°F	-10° - +25°F	-10° - +25°F
Refrigerant	R-404A	R-404A	R-404A	R-404A

*Based on 100°F ambient cycling at set point



REFRIGERATION SERIES

PROFESSIONAL SERIES - DUAL TEMPS

REFRIGERATORS and FREEZERS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



RFH1-SSB-HSE RFH2-SSB RFH2-SSB-HD RFH3-SSB RFH3-SSB-HD

Interior Storage Capacity (ea. section)	Ref 9.1 ft ³ Frz 10.5 ft ³	22.3 ft ³	22.3 ft ³	Ref 48.0 ft ³ Frz 22.3 ft ³	Ref 48.0 ft ³ Frz 22.3 ft ³
Overall Width	27.5"	55"	55"	82.5"	82.5"
Overall Depth	33.6"	33.6"	33.6"	33.6"	33.6"
Height (including 4" casters)	78"	82.5"	82.5"	82.5"	82.5"
Depth with doors open at 90°	58.5"	58.5"	58.5"	58.5"	58.5"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	6 (3 ea.)	6 (3 ea.)	Ref 6 / Frz 3	Ref 6 / Frz 3
Center Shelves	N/A	N/A	N/A	Ref 3 / Frz 0	Ref 3 / Frz 0
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	490 lbs.	750 lbs.	750 lbs.	992 lbs.	992 lbs.
Crated Height	85"	85"	85"	85"	85"
Crated Width	32"	59"	59"	87"	87"
Crated Depth	38"	38"	38"	38"	38"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	9.5	17**	17**	20.6**	20.6**
HACR Breaker	15.0	20.0	20.0	30.0	30.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	10.0	12.9	13.5	17.1	16.6
Heat Rejection (BTU / hr)	1630	2580	2580	3035	3035
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F
Refrigerant	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A

*Based on 100°F ambient cycling at set point

**For reference only

REFRIGERATION SERIES



PROFESSIONAL SERIES - PASS THRU

REFRIGERATORS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet walls (and Solid Door models) are foamed with R-134A CFC-free polyurethane foam
- Double pane heated glass doors
- Cylinder door locks standard
- EverCheck® controls with audio and visual alert



PTRISSE-HGHS PTRISSE-FGFG PTRISSE-HGHG PTRISSE-FSFS PTRISSE-HSHS

Interior Storage Capacity	23.8 ft ³				
Overall Width	27.5"	27.5"	27.5"	27.5"	27.5"
Overall Depth	35.9"	35.9"	35.9"	35.9"	35.9"
Height (including 4" casters)	82.5"	82.5"	82.5"	82.5"	82.5"
Depth with doors open at 90°	85.1"	84.7"	84.7"	85.9"	85.9"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	3	3	3	3
Center Shelves	N/A	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	21.2" x 30.75"				
Crated Shipping Weight	475 lbs.				
Crated Height	85"	85"	85"	85"	85"
Crated Width	32"	32"	32"	32"	32"
Crated Depth	38"	38"	38"	38"	38"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	12.0	12.0	12.0	12.0	12.0
HACR Breaker	15.0	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	4.5	4.4	4.5	4.2	4.2
Heat Rejection (BTU / hr)	2273	2630	2630	1700	1700
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F				
Control Set Point Range	+36° - +50°F				
Refrigerant	R-404A	R-404A	R-404A	R-404A	R-404A

*Based on 100°F ambient cycling at set point



REFRIGERATION SERIES

PROFESSIONAL SERIES - PASS THRUS

REFRIGERATORS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- Door glass is triple pane, argon filled with Low-E non-reflective coating
- EverCheck® controls with audio and visual alert



PTR2SSB-FGFG

PTR2SSB-HGHG

PTR2SSE-FSFS

PTR2SSE-HSHS

	PTR2SSB-FGFG	PTR2SSB-HGHG	PTR2SSE-FSFS	PTR2SSE-HSHS
Interior Storage Capacity	51.3 ft ³	51.3 ft ³	51.3 ft ³	51.3 ft ³
Overall Width	55"	55"	55"	55"
Overall Depth	35.9"	35.9"	35.9"	35.9"
Height (including 6" adj. legs)	84.5"	84.5"	84.5"	84.5"
Depth with doors open at 90°	85.9"	85.9"	85.9"	85.9"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	6	6	6	6
Center Shelves	3	3	3	3
Shelf Dimensions (W x D)	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"
Crated Shipping Weight	700 lbs.	700 lbs.	700 lbs.	700 lbs.
Crated Height	85"	85"	85"	85"
Crated Width	59"	59"	59"	59"
Crated Depth	39"	39"	39"	39"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	12.0	12.0	12.0	12.0
HACR Breaker	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	16.6	16.6	6.3	6.3
Heat Rejection (BTU / hr)	2360	2360	2360	2360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
Refrigerant	R-404A	R-404A	R-404A	R-404A

*Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



PROFESSIONAL SERIES - ROLL-INS

REFRIGERATORS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature even when full
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- Stainless steel ramp and interior rack guides allows rack to roll easily
- EverCheck® controls with audio and visual alert



RIR1-SSB



RIR2-SSB

Interior Storage Capacity	37.7 ft ³	77.3 ft ³
Overall Width	35"	68"
Overall Depth (including 4" for Ramp)	38.4"	38.4"
Height	90.5"	90.5"
Depth with doors open at 90°	65"	65"
Door opening width	29.4"	29.4"
Door opening height	72.8"	72.8"
Adjustable Shelves	N/A	N/A
Center Shelves	N/A	N/A
Maximum Rack Size (WxDxH) (Rack by others)	27" x 29" x 72"	27" x 29" x 72"
Crated Shipping Weight	500 lbs.	825 lbs.
Crated Height	95.4"	95.4"
Crated Width	39"	72"
Crated Depth	40.75"	40.75"
Voltage	115V/60/1	115V/60/1
Amperage	7.0	7.0
HACR Breaker	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	5.5	8.30
Heat Rejection (BTU / hr)	1135	1717
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	+36° - +50°F	+36° - +50°F
Refrigerant	R-404A	R-404A

*Based on 100°F ambient cycling at set point



REFRIGERATION SERIES

PROFESSIONAL SERIES - HOT FOOD HOLDING CABINET

HOT FOOD HOLDING CABINET

- Stainless steel interior and exterior
- Innovative ducted air distribution system eliminates hot and cold spots in cabinet
- High density fiberglass insulation in cabinet top, sides, back, bottom and doors
- Universal tray slides (13 sets) standard
- Easy to use LED digital controller (fahrenheit or celsius) with separate on/off switch, high/low temperature alarms
- Self closing all stainless steel doors with locks



HHI-SSB-FS



HHI-SSB-HS

Interior Storage Capacity	24.9 ft ³	24.9 ft ³
Overall Width	27.5"	27.5"
Overall Depth	33.75"	33.75"
Height (including 5" casters)	84.5"	84.5"
Depth with doors open at 90°	58.6"	58.6"
Door Opening Width	22"	22"
Door Opening Height	27"	27"
Tray Slides	13 Sets	13 Sets
Crated Shipping Weight	475 lbs.	475 lbs.
Crated Height	85"	85"
Crated Width	32"	32"
Crated Depth	38"	38"
Voltage	115V/60/1	115V/60/1
Amperage	14.2	14.2
HACR Breaker	20.0	20.0
*Energy Consumption (kwh / day) ENERGY STAR / DOE	11.08	11.08
*Heat Rejection (BTU / hr)	N/A	N/A
Voltage Range	110 - 120	110 - 120
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	90° - 190°F	90° - 190°F

*Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



PROFESSIONAL SERIES - UNDERCOUNTERS

REFRIGERATORS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- EverCheck® controls
- 4" Heavy duty casters standard



HUR40A

HUR68A

HUR96A

HUR40A-D

HUR68A-D

HUR96A-D

	HUR40A	HUR68A	HUR96A	HUR40A-D	HUR68A-D	HUR96A-D
Interior Storage Capacity	8.5 ft ³	18.8 ft ³	29.1 ft ³	8.5 ft ³	18.8 ft ³	29.1 ft ³
Overall Width	40.25"	68"	95.8"	40.25"	68"	95.8"
Overall Depth	32.3"	32.3"	32.3"	32.3"	32.3"	32.3"
Height (including 4" casters)	33.9"	33.9"	33.9"	33.9"	33.9"	33.9"
Depth with doors open at 90° -OR- drawers fully open	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"
Interior Door opening width	22.5"	22.5"	22.5"	N/A	N/A	N/A
Interior Door opening height	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"
Adjustable Shelves	2	4	6	N/A	N/A	N/A
Center Shelves	N/A	N/A	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	25" x 24.6"	25.9" x 24.6"	N/A	N/A	N/A
Crated Shipping Weight	312 lbs.	435 lbs.	558 lbs.	375 lbs.	546 lbs.	725 lbs.
Crated Height	39.5"	39.5"	39.5"	39.5"	39.5"	39.5"
Crated Width	44.25"	72"	99.8"	44.25"	72"	99.8"
Crated Depth	36.25"	36.25"	36.25"	36.25"	36.25"	36.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	5.0	4.8	6.0	5.0	5.0	6.0
HACR Breaker	15.0	15.0	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	2.4	2.8	4.5	3.2	4.9	6.0
Heat Rejection (BTU / hr)	449	638	740	449	695	740
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a	R-134a

*Based on 100°F ambient cycling at set point



REFRIGERATION SERIES

PROFESSIONAL SERIES - UNDERCOUNTERS

FREEZERS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade 300 Series stainless steel inside and out
- EverCheck® controls
- 4" Heavy duty casters standard



HUF40A



HUF68A



HUF40A-D



HUF68A-D

Interior Storage Capacity	8.5 ft ³	18.8 ft ³	8.5 ft ³	18.8 ft ³
Overall Width	40.25"	68"	40.25"	68"
Overall Depth	32.3"	32.3"	32.3"	32.3"
Height (including 4" casters)	33.9"	33.9"	33.9"	33.9"
Depth with doors open at 90° -OR- drawers fully open	56.8"	56.8"	58.1"	58.1"
Interior Door opening width	22.5"	22.5"	N/A	N/A
Interior Door opening height	24.3"	24.3"	9.9"	9.9"
Adjustable Shelves	2	4	N/A	N/A
Center Shelves	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	25" x 24.6"	N/A	N/A
Crated Shipping Weight	317 lbs.	442 lbs.	375 lbs.	553 lbs.
Crated Height	39.5"	39.5"	39.5"	39.5"
Crated Width	44.25"	72"	44.25"	72"
Crated Depth	36.25"	36.25"	36.25"	36.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	5.5	10.0	5.5	10.0
HACR Breaker	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	5.0	9.5	8.9	14.8
Heat Rejection (BTU / hr)	1133	1708	1267	1791
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-13° - +19°F	-13° - +19°F	-13° - +19°F	-13° - +19°F
Refrigerant	R-404A	R-404A	R-404A	R-404A

*Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



PROFESSIONAL SERIES - WORKTOPS

REFRIGERATORS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Top includes 4" backsplash
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- EverCheck® controls
- 6" Heavy duty casters standard



	HWR40A	HWR68A	HWR96A	HWR40A-D	HWR68A-D	HWR96A-D
Interior Storage Capacity	8.5 ft ³	18.8 ft ³	29.1 ft ³	8.5 ft ³	18.8 ft ³	29.1 ft ³
Overall Width	40.25"	68"	95.8"	40.25"	68"	95.8"
Overall Depth	32.3"	32.3"	32.3"	32.3"	32.3"	32.3"
Height (including 6" casters)	39.9"	39.9"	39.9"	39.9"	39.9"	39.9"
Depth with doors open at 90° -OR- drawers fully open	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"
Interior Door opening width	22.5"	22.5"	22.5"	N/A	N/A	N/A
Interior Door opening height	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"
Adjustable Shelves	2	4	6	N/A	N/A	N/A
Center Shelves	N/A	N/A	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	25" x 24.6"	25.9" x 24.6"	N/A	N/A	N/A
Crated Shipping Weight	317 lbs.	443 lbs.	561 lbs.	375 lbs.	554 lbs.	734 lbs.
Crated Height	43.25"	43.25"	43.25"	43.25"	43.25"	43.25"
Crated Width	44.25"	72"	99.8"	44.25"	72"	99.8"
Crated Depth	36.25"	36.25"	36.25"	36.25"	36.25"	36.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	5.0	5.0	6.0	5.0	5.0	6.0
HACR Breaker	15.0	15.0	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	2.4	2.8	4.5	3.2	4.9	6.0
Heat Rejection (BTU / hr)	449	638	740	449	695	852
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
Refrigerant	R-134a	R-134a	R-134a	R-134a	R-134a	R-134a

*Based on 100°F ambient cycling at set point



REFRIGERATION SERIES

PROFESSIONAL SERIES - WORKTOPS

FREEZERS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Top includes 4" backsplash
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade 300 Series stainless steel inside and out
- EverCheck® controls
- 6" Heavy duty casters standard


HWF40A

HWF68A

HWF40A-D

HWF68A-D

Interior Storage Capacity	8.5 ft ³	18.8 ft ³	8.5 ft ³	18.8 ft ³
Overall Width	40.25"	68"	40.25"	68"
Overall Depth	32.3"	32.3"	32.3"	32.3"
Height (including 6" casters)	39.9"	39.9"	39.9"	39.9"
Depth with doors open at 90° -OR- drawers fully open	56.8"	56.8"	58.1"	58.1"
Interior Door opening width	22.5"	22.5"	N/A	N/A
Interior Door opening height	24.3"	24.3"	9.9"	9.9"
Adjustable Shelves	2	4	N/A	N/A
Center Shelves	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	25" x 24.6"	N/A	N/A
Crated Shipping Weight	322 lbs.	450 lbs.	380 lbs.	561 lbs.
Crated Height	43.25"	43.25"	43.25"	43.25"
Crated Width	44.25"	72"	44.25"	72"
Crated Depth	36.25"	36.25"	36.25"	36.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	5.5	10.0	5.5	10.0
HACR Breaker	15.0	15.0	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	5.0	9.5	8.9	14.8
Heat Rejection (BTU / hr)	1133	1708	1267	1791
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-13° - +19°F	-13° - +19°F	-13° - +19°F	-13° - +19°F
Refrigerant	R-404A	R-404A	R-404A	R-404A

*Based on 100°F ambient cycling at set point

REFRIGERATION SERIES



PROFESSIONAL SERIES - PREP TABLES

REFRIGERATORS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Refrigerated rails is mechanically cooled and is equipped with a 1" drain
- Exclusive "Night Switch" control setting allows over night product storage in rail with cover closed
- Doors are constructed of high-grade stainless steel inside and out
- Drawer fronts are constructed of high-grade stainless steel inside and out
- EverCheck® controls
- 4" Heavy duty casters standard


HPR46A

HPR72A

HPR46A-D

HPR72A-D

Interior Storage Capacity	8.5 ft ³	18.8 ft ³	8.5 ft ³	18.8 ft ³
Overall Width	46"	72"	46"	72"
Overall Depth	32.3"	32.3"	32.3"	32.3"
Height (including 4" casters)	44.8"	44.8"	44.8"	44.8"
Depth with doors open at 90° / Depth with drawer fully open (-D)	56.8"	56.8"	58.1"	58.1"
Door opening width	22.5"	22.5"	22.5"	22.5"
Door opening height / Drawer opening height (-D)	24.3"	24.3"	9.9"	9.9"
Adjustable Shelves	1	2	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	22.4" x 24.6"	N/A	N/A
Crated Shipping Weight	373 lbs.	585 lbs.	431 lbs.	696 lbs.
Crated Height	51.8"	51.8"	51.8"	51.8"
Crated Width	50"	76"	50"	76"
Crated Depth	36.25"	36.25"	36.25"	36.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	7.6	13.6	7.6	13.6
HACR Breaker	15.0	20.0	15.0	20.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	7.3	13.9	7.3	16
Heat Rejection (BTU / hr)	1044	1976	1043.5	2275
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F	45° - 86°F	45° - 86°F
Control Set Point Range (Base)	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
Control Set Point Range (Rail)	-13° - +53°F	-13° - +53°F	-13° - +53°F	-13° - +53°F
Refrigerant	R-404A	R-404A	R-404A	R-404A

*Based on 86°F ambient cycling at set point



OPTIONS & ACCESSORIES

FOR REACH-INS

CASTERS

- Equipped w/ Front Locking Brakes




FOOT PEDAL DOOR OPENER

- For Hands Free Operation



SHELVES

- Stainless Steel Shelf
- Epoxy Coated Shelf




CENTER SHELVES

- Stainless Steel Shelf
- Epoxy Coated Shelf



TRAY / PAN SLIDES

- 16 max recommendation per section
- Universal size accommodates:
Baker Pans: width 17 7/8" to 18"
length 25 3/4" to 26"
Hotel Pans: width 12 7/8" to 13"
length 20 3/4" to 20 7/8"



MISCELLANEOUS RAISED RAIL

- Adapter Rail
- Cutting Boards

SECURITY

- Padlock Hasp for 1 and 2 Section Reach-Ins
- Correctional Facility Packages Available

PROFESSIONAL SERIES DOOR REVERSAL KIT

- Full Door Kit
- Half Door Kit

COMMERCIAL SERIES DOOR REVERSAL KIT

- Full Door Kit
- Half Door Kit

MISCELLANEOUS - UNDERCOUNTER

- Stainless Steel Back
- Double Sided Bull Nose Worktop

MISCELLANEOUS - WORKTOP

- Stainless Steel Back
- Double Sided Bull Nose Worktop

MISCELLANEOUS - PROFESSIONAL SERIES UPRIGHTS

- Remote Monitoring Control Board (for NAFEM Data Protocol)

WARRANTIES



KM CUBER / IM CUBER / DKM ICE MACHINE & DISPENSER and HOTEL / MOTEL DISPENSING BINS

Three Year	Parts & Labor on entire machine
Five Year	Parts & Labor on: Evaporator
Five Year	Parts on: Compressor; air-cooled condenser

AM-50 CUBER and C-101 FLAKERS

Two Year	Parts & Labor on entire machine
----------	---------------------------------

FLAKERS and CUBELET ICE MACHINES

Three Year	Parts & Labor on entire machine*
	* (Serial numbers Vxxxxxj and after.)
Five Year	Parts on: Compressor; air-cooled condenser

DCM / DT SANITARY CUBELET ICEMAKER / DISPENSER

Three Year	Parts & Labor on entire machine
Five Year	Parts on: Compressor; air-cooled condenser

DM ICE DISPENSER

Two Year	Parts & Labor on entire dispenser
----------	-----------------------------------

BINS

Two Year	Parts & Labor on slope front bins (Production prior to Jan. 2012) & DMDispenser
Three Year	Parts & Labor on slope front bins (Jan. 2012 production and after)
Five Year	Parts & Labor on large upright models

COUNTERTOP REFRIGERATED DISPLAY CASES

One Year	Parts & Labor on entire unit
Two Year	Parts & Labor on: Compressor, evaporator, air-cooled condenser
Five Year	Parts on: Compressor; air-cooled condenser

REMOTE CONDENSERS

Cubers: Three Year	Parts & Labor on entire machine
Five Year	Parts & Labor: Air-cooled condenser coil
Flakers: Three Year	Parts & Labor on entire machine
Five Year	Parts on: Air-cooled condenser coil

REACH-IN WARRANTY

Three Year	Parts & Labor on entire machine
Five Year	Parts on: Compressor - Additional warranties available



HOSHIZAKI AMERICA, INC.

618 Hwy. 74, South
Peachtree City, GA 30269
TEL 800-438-6087 | (770) 487-2331
FAX 800-345-1325 | (770) 487-1325
www.hoshizakiamerica.com

“A Superior Degree of Reliability”

©2015 Hoshizaki America, Inc.

Item #40067 | 2/24/2015